



Booth & Display Guidelines

LINEAR & CORNER BOOTH

LINEAR BOOTH

Linear Booths, also called “in-line” booths, are generally arranged in a straight line and have neighboring exhibitors on their immediate right and left, leaving only one side exposed to the aisle.

Dimensions

For purposes of consistency and ease of layout and/or reconfiguration, floor plan design in increments of 10ft has become the de facto standard in the United States. Therefore, unless constricted by space or other limitations, Linear Booths are most commonly 10ft wide and 10ft deep, i.e. 10ft by 10ft. The maximum back wall height limitation is 8ft.




Use of Space

Regardless of the number of Linear Booths utilized, e.g. 10ft by 20ft, 10ft by 30ft, 10ft by 40ft, etc. display materials should be arranged in such a manner so as not to obstruct sight lines of neighboring exhibitors.

The maximum height of 8ft is allowed only in the rear half of the booth space, with a 4ft height restriction imposed on all materials in the remaining space forward to the aisle. Note: When three or more Linear Booths are used in combination as a single exhibit space, the 4ft height limitation is applied only to that portion of exhibit space which is within 10ft of an adjoining booth.

CORNER BOOTH

A Corner Booth is a Linear Booth at the end of a series of in-line booths with exposure to intersecting aisles on two sides. All other guidelines for Linear Booths apply.

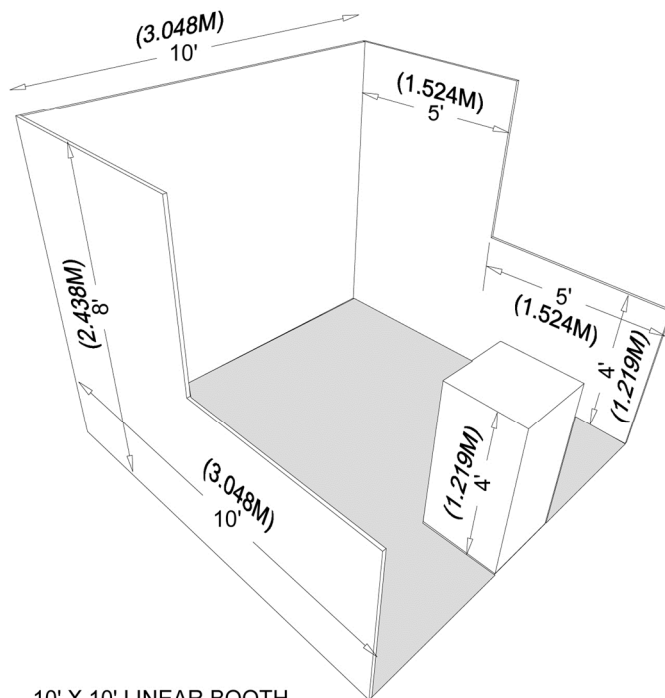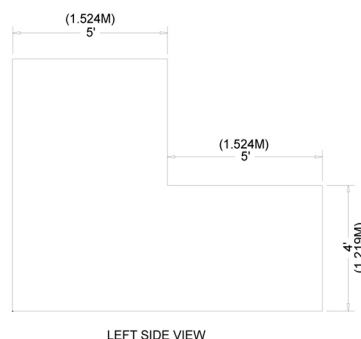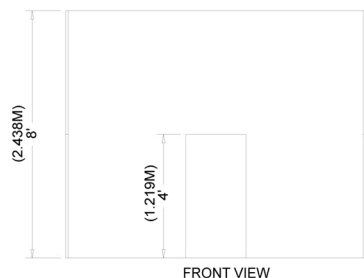


Booth & Display Guidelines

PERIMETER BOOTH

A Perimeter Booth is a Linear Booth that backs to an outside wall of the exhibit facility rather than to another exhibit.

Dimensions and Use of Space

All guidelines for Linear Booths apply to Perimeter Booths except that the maximum back wall height is 12-14ft

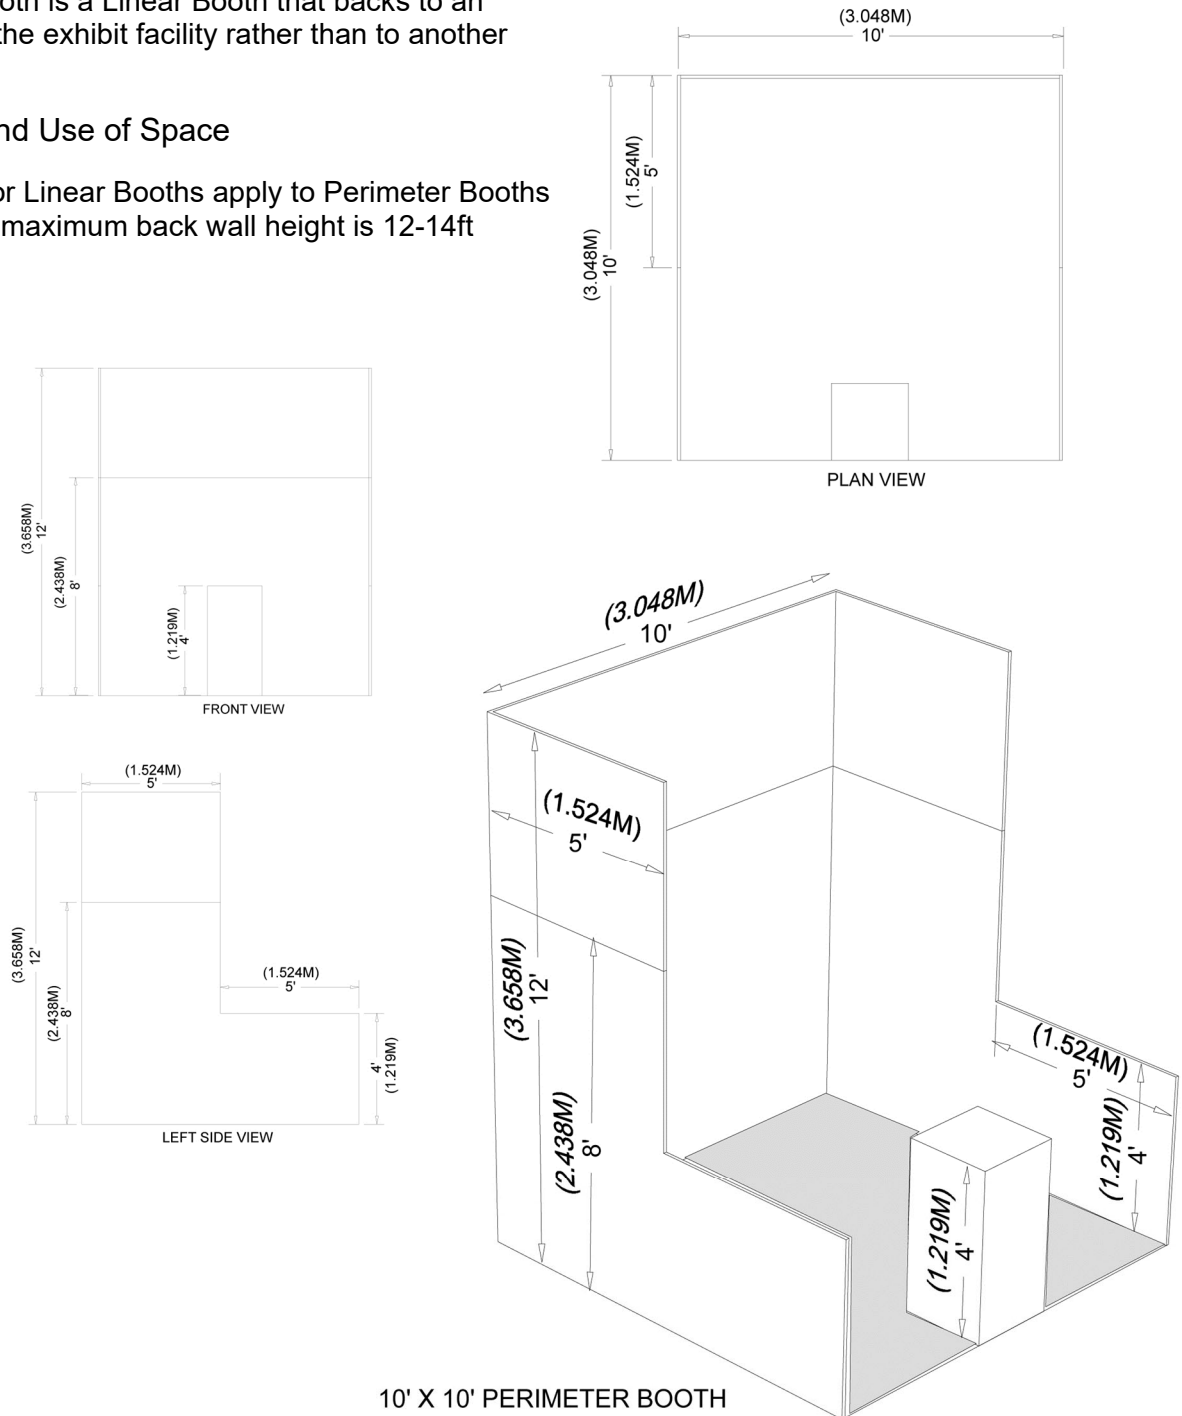



Booth & Display Guidelines

ISLAND BOOTH




An Island Booth is any size booth exposed to aisles on all four sides.

Dimensions

An island booth is typically 20ft x 20ft or larger, although it may be configured differently.

Use of Space

The entire cubic content of the space may be used up to the maximum allowable height, which is 20ft including signage.

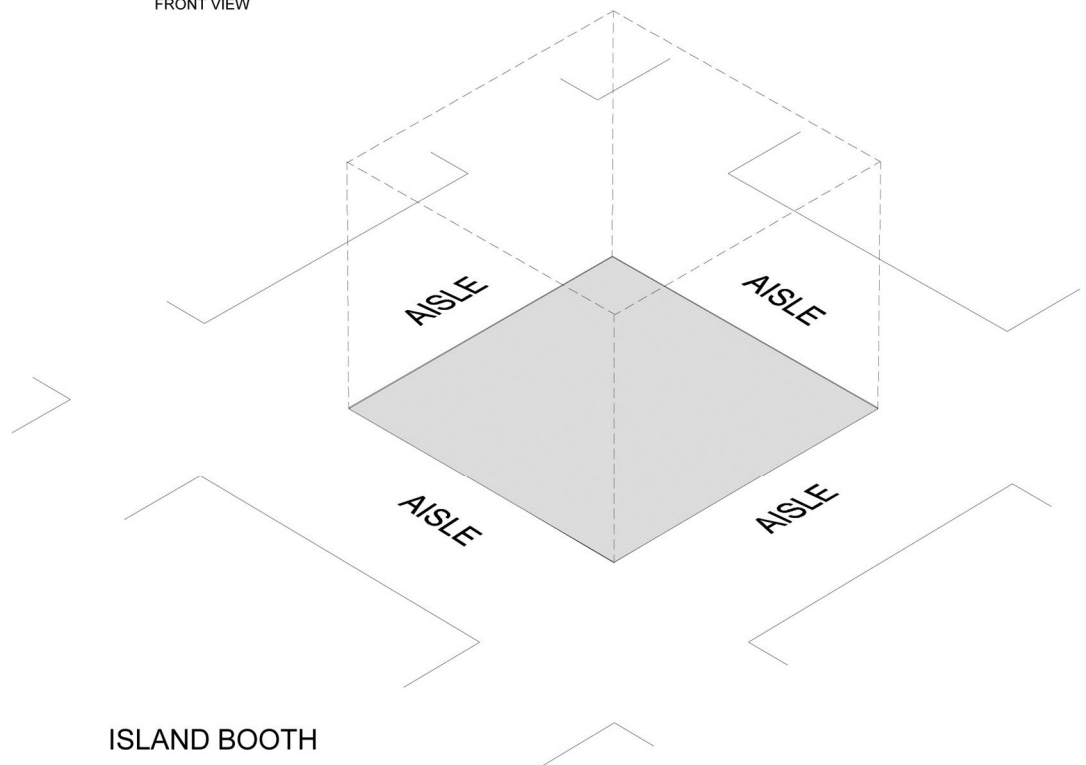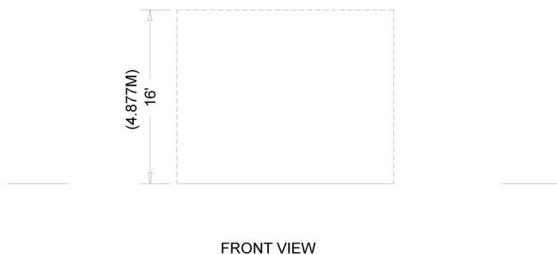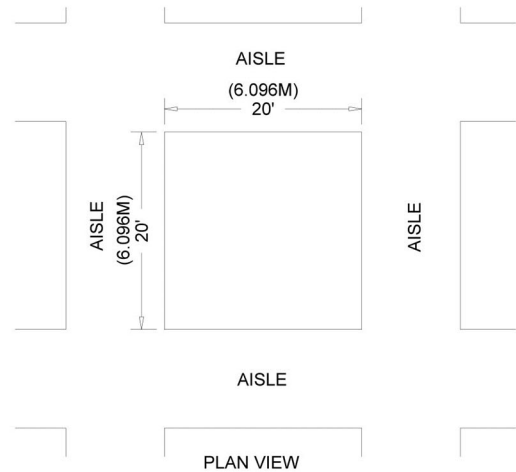




Booth & Display Guidelines

PENINSULA BOOTH

A Peninsula Booth is exposed to aisles on three sides, and comprised of a minimum of four booths. There are two types of Peninsula Booths: (a) one which backs to Linear Booths, and (b) one which backs to another Peninsula Booth and is referred to as a "Split Island Booth."

Dimensions

A Peninsula Booth is usually 20ft by 20ft or larger. When a Peninsula Booth backs up to two Linear Booths, the back wall is restricted to 4ft high within 5ft of each aisle, permitting adequate line of sight for the adjoining Linear Booths. The maximum height range allowance is 20ft, including signage for the center portion of the back wall. Double-sided signs, logos and graphics shall be set back ten feet (10') from adjacent booths.

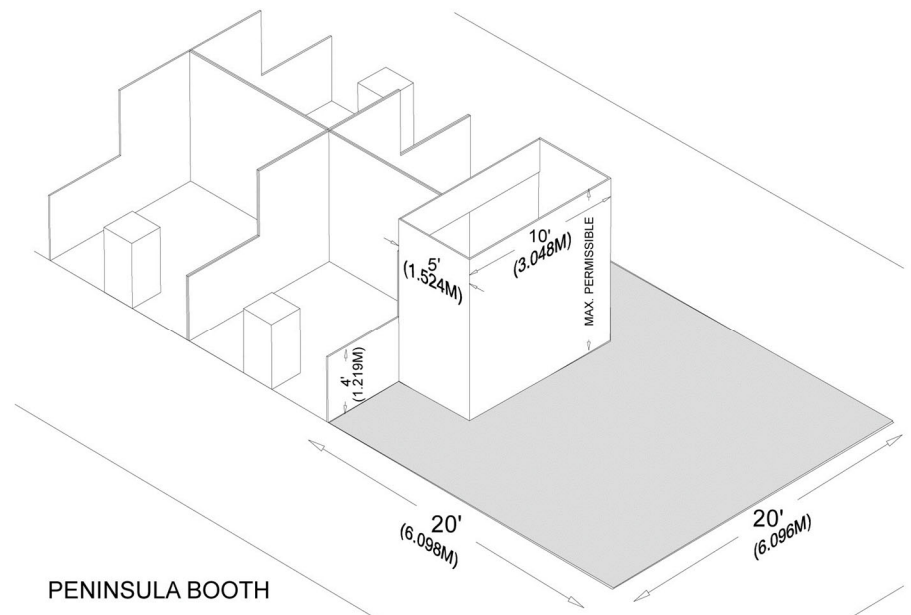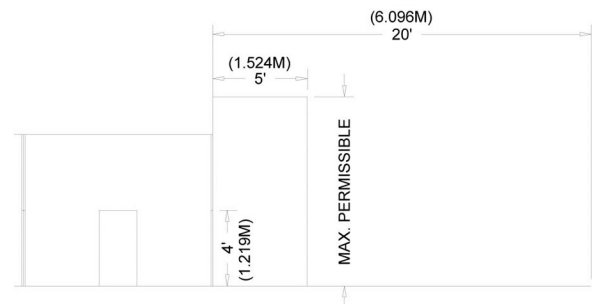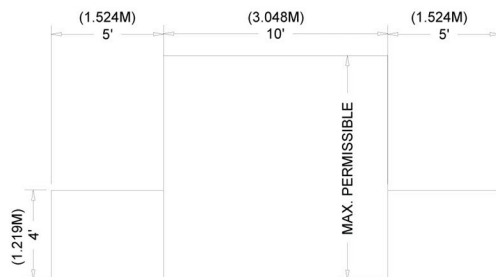


Display Regulations

CANOPIES AND CEILINGS

Canopies, including ceilings, umbrellas and canopy frames, can be either decorative or functional (such as to shade computer monitors from ambient light or to allow for hanging products). Canopies for Linear or Perimeter Booths should comply with Line-of-Sight requirements.

The bottom of the canopy should not be lower than 7ft from the floor within 5ft of any aisle. Canopy supports should be no wider than three inches 3in. This applies to any booth configuration that has a sight line restriction, such as a Linear Booth. Fire and safety regulations in many facilities strictly govern the use of canopies, ceilings, and other similar coverings. Check with Show Management prior to determining specific exhibition rules.

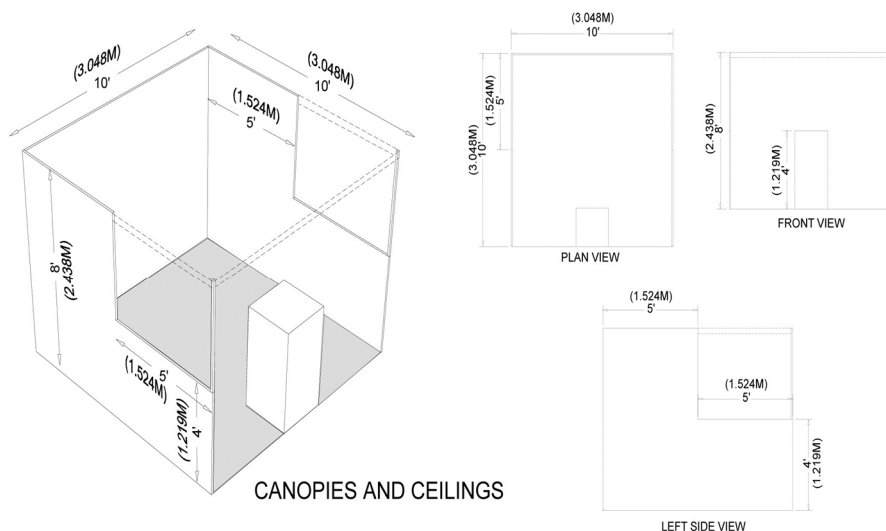

HANGING SIGNS & GRAPHICS

Most exhibition rules allow for hanging signs and graphics in all standard Peninsula and Island Booths, usually to a maximum height range of 20ft from the top of the sign. The distance is measured from the floor to the top of the sign. Whether suspended from above, or supported from below, they should comply with all ordinary use of space requirements. For example, the highest point of any sign should not exceed the maximum allowable height for the booth type.

Hanging Signs and Graphics should be set back 10ft from adjacent booths and be directly over contracted space only. Approval for the use of Hanging Signs and Graphics, at any height, should be received from Show Management at least 60 days prior to installation. Variances may be issued at the Show Management's discretion. Drawings should be available for inspection.

All decorations, signs, banners, may not be taped, nailed, or otherwise attached to any ceiling, window, painted surface, or wall of the facility. Both the Show Manager and the Convention Services Manager must approve the location and method of installation of any special decorations or signs.



MARKETPLACE

July 14 - 15, 2019 | Houston, Texas | www.tramarketplace.com

TOWERS

A Tower is a free-standing exhibit component separate from the main exhibit fixture. The height restriction is the same as that which applies to the appropriate exhibit space configuration being used. Towers in excess of 8ft should have drawings available for inspection. Fire and safety regulations in many facilities strictly govern the use of towers. A building permit or safety lines may be required.

MULTI-STORY EXHIBIT

A Multi-Story Exhibit is a booth where the display fixture includes two or more levels. Multi-Level Exhibit drawings must be submitted for plan review by the Fire Marshal and must meet the following requirements:

1. Meet or exceed the requirements of NFPA 101 Life Safety Code 2000 ed.
2. Drawings must bear a current registered design professional's stamp (Architect, Structural Engineer, Fire Protection Engineer, etc.). Expired licenses are unacceptable. The professional stamp shall include the state of certification, name of the design professional; his/her license number, signature, registered Engineering firm name and firm number.
3. Measurements must be in inches/feet (not metric).
4. Multi-deck structures exceeding 300 sq. ft of net floor area must have two (2) remote exit stairs; occupant load factor is 15 net sq. ft per person per table 7.3.1.2 of NFPA 101 Life Safety Code, 2000 edition.
5. Stairway widths shall be:
 - a. A minimum of 36 inches where the occupant load of the upper level is less than 50.
 - b. A minimum of 44 inches where the occupant load of the upper level is 50 or more.
 - c. Occupant loads shall be stated on the plan.
6. Handrails shall not be less than 34 inches and not more than 38 inches above the surface of the tread.
7. Handrails are required on both sides. A sign must be placed at the bottom of the stairs stating "Please Use Caution and Hold the Handrail".
8. Spiral stairways shall be permitted in accordance with section 7.2.2.2.3.3 of NFPA 101, 2000 ed., such that:
 - a. Occupant load does not serve more than 3.



MARKETPLACE

- b. Clear width of stairs is not less than 26 inches.
 - c. Handrails shall be provided on both sides.
- 9. Guards shall:
 - a. Not be less than 42 inches high.
 - b. Open guards shall have intermediate rails or an ornamental pattern to prevent a 4 inch diameter sphere to pass through any opening up to a height of 34 inches.
- 10. Battery-operated smoke detectors shall be installed on a smooth surface under the first level ceiling and spaced no more than 30 feet apart if applicable and installed on the upper floor level with a covered ceiling.
- 11. Hard covered ceilings shall have a smoke detector installed and if fabric/textile is used to cover the upper deck area, it must be flame resistant. Certificate must be submitted with plan.
- 12. One portable fire extinguisher, minimum 2A:10BC with current inspection tag by a licensed company shall be provided at each level of the exhibit.
- 13. Any stationary units (container or other units) using the upper areas as a deck must submit plans.