

# OCCC EXHIBITOR ELECTRICAL CONDITIONS

#### **Electrical Conditions & Guidelines:**

- 1. All equipment regardless of source of power must comply with the National Electrical Code, and all Federal, State, and Local Safety Codes.
- 2. Use of open clip sockets, latex or lamp cord wire, unapproved duplex or triplex attachment plugs in exhibits is prohibited.
- 3. Permanent building electrical outlets are not a part of booth space and are not to be used by exhibitors unless specified otherwise.
- 4. Under NO circumstances shall anyone other than an OCCC electrician make electrical connections to house equipment.
- 5. Special equipment requiring company engineers or technicians for assembly, servicing, preparatory work, and operation may be executed without a house electrician; however, all service connections and overload protection to such equipment must be made by a house electrician only.
- 6. All equipment must be properly tagged or marked with complete information as to the type and/or amount of current, voltage, phase, frequency, horsepower, etc. required.
- 7. All material and equipment furnished by the OCCC for this service order shall remain the property of the OCCC and shall be removed ONLY by the OCCC at the close of the show.
- 8. Unless otherwise directed, OCCC electricians are authorized to cut floor coverings to permit installation of service.
- 9. All exhibitors 120 VOLT cords must be of the 3 wire, grounded type. All exposed non-current carrying metal parts of fixed equipment, which are liable to be energized, shall be grounded.
- 10. The OCCC reserves the right to refuse connection to any exhibitor whose equipment is deemed unsafe by OCCC's electrical supervisors.
- 11. Incentive orders will receive priority service.
- 12. Prices are based upon current wage rates and are subject to change without notice.
- 13. All payments MUST be paid in full before services are provided. Onsite orders are subject to a 50% increase over the base rate.
- 14. The exhibitor releases, waives and holds harmless the OCCC, it officers, employees and agents for any liability, claims, and damages arising out of any of the services or equipment provided herein. The exhibitor shall indemnify the OCCC for any bodily injury or property damage resulting from any negligent act or omission of the exhibitor, its officer, employees or agents.
- 15. Claims will NOT be considered unless filed by Exhibitor before the close of show at the Service Desk.
- 16. Obstructions blocking utility floor boxes are subject to relocation as necessary.
- 17. The OCCC will charge time and materials for exhibitor or appointed contractor installed cords, which require troubleshooting and/or redistribution.
- 18. All electrical services are to be billed to the next greatest wattage (i.e. 15amp 208v single phase = 20amp 208v single phase).
- 19. The OCCC does not provide distribution panels. If an exhibitor orders "bulk power", the OCCC will not provide distribution panels to the exhibitor; they must provide their own.



# OCCC EXHIBITOR ELECTRICAL CONDITIONS

# **208V ELECTRICAL PLUG INFORMATION**

The Orange County Convention OCCC is a UL-certified manufacturing facility. Exhibitors will need to provide proper ULcertified plugs for connection to equipment. If you are unable to bring a UL-certified plug to match the power you have ordered in your booth, you may rent one from the OCCC. Exhibitors are responsible for returning all rented UL-certified plugs to the Exhibitor Services desk at the close of the event. **All unreturned plugs will result in a \$150 charge.** 

#### **20 AMP SINGLE PHASE-FLOOR**

Industry standard for low amperage industrial equipment. Two hots, neutral and a ground. Our standard plug is a **L21-20**.

#### **20 AMP THREE PHASE-FLOOR**

Industry standard for low amperage industrial equipment. Three hots, neutral and a ground. Our standard plug is a **L21-20**.

Rental Fee: \$93.00

#### **30 AMP SINGLE PHASE**

Industry standard for low amperage industrial equipment. Two hots, neutral and a ground. Our standard plug is a **L21-30**.

#### **30 AMP THREE PHASE**

Industry standard for low amperage industrial equipment. Three hots, neutral and a ground. Our standard plug is a **L21-30**.

Rental Fee: \$93.00

#### 40, 50, 60, 80 OR 100 AMP SINGLE PHASE

Industry standard for low amperage industrial equipment. Two hots, neutral and a ground.

#### 40, 50, 60, 80 OR 100 AMP THREE PHASE

Industry standard for low amperage industrial equipment. Three hots, neutral and a ground.

Rental Fee: \$93.00

#### 150, 200, OR 400 AMP SINGLE/THREE PHASE

Industry standard for high amperage industrial equipment. Two hots, neutral and a ground. A refundable deposit is required for connection. Will be connected using cam locks. **Aerial Rigging Required.** 

Rental Fee: \$93.00











# OCCC EXHIBITOR RIGGING CONDITIONS

### **Rigging Conditions & Guidelines**

The OCCC is the exclusive rigging service provider for exhibitors. In order for the OCCC to provide the best possible service to our clients, the following rigging guidelines are applicable to all show managers, service contractors, exhibitors and exhibitor appointed contractors (EACs).

- 1. The OCCC is the exclusive provider of rigging services.
- 2. All rigging must conform to Show Management rules, regulations, and facility limitations.
- 3. The use of any type of tape/adhesive for attaching signs, banners, or decorations to the building, walls, or decorative surfaces is not permitted.
- 4. All equipment, signs, products, etc. must be designed to suspend safely. In some cases, signs may require a structural engineer's seal of approval.
- 5. Care must be taken to use only rated rigging hardware when designing, constructing or purchasing such items. All hardware is required to have a working load limit (WLL).
- 6. Rigging plots, drawings, blueprints or engineers certification (when requested) must be submitted to the OCCC Rigging department a MINIMUM of THREE WEEKS in advance of the first move-in day for your show and must include the location, the dimensions, the height above the floor to the top, and the weight of the suspended item. They must also show booth outline with aisles marked for reference.
- 7. All points where nylon slings are used will require a steel safety cable.
- 8. All assembly of equipment, signs, products, etc., is the responsibility of the exhibitor or exhibitor appointed contractor.
- 9. Any equipment, signs, products, etc. deemed to be unsafe for overhead suspension by the Orange County Convention Center Rigging Services Department will not be allowed.
- 10. A credit card must be placed on file with the Method of Payment form for any additional charges.
- 11. The OCCC does not accept purchase orders.
- 12. Actual time and date of rigging may vary during move-in and move-out of your show in order to reduce costs to you.
- 13. All orders for rigging will be handled in the order in which the paper work is signed off at the OCCC Exhibitor Services desk or at the discretion of the OCCC Rigging department.
- 14. If you are not flexible and need a DEFINITIVE DATE AND TIME, you need to order a Dedicated Rigging Team. The exhibitor will be charged a minimum of 4 hours up and 4 hours down times the number of riggers needed.
- 15. The OCCC's Rigging department can be reached by phone (407) 685-5555, or via fax (407) 685-5974 to clarify or assist you with any concerns you have in regards to aerial rigging at the OCCC.
- 16. The OCCC is not responsible for any rigging items (banners, signs, etc.) left in the booth during move-out if the exhibitor is not present.



# OCCC EXHIBITOR RIGGING CONDITIONS

#### Seams:

- 1. When using cloth material, seams need to be double stitched on the top and bottom.
- 2. Heat Seam is ONLY acceptable when hanging lightweight vinyl drape.
- 3. If the vinyl drape to be used as a drop down for a sign or banner, which would include a bottom batten to attach the foam core, sintra, or cloth/vinyl banner, we require double stitching on the vinyl drape due to weight considerations and possible failure of the heat seam.

#### Adhesive:

- 1. Adhesive or glue tape is not acceptable due to the tendency of it to come loose under weight.
- 2. The use of any type of adhesive for attaching signs, banners, or decorations to the building walls or decorative surfaces (inside or outside) is NOT PERMITTED.

#### **Exterior Banners:**


- 1. Banners to be installed on the exterior of the building must be designed with the elements in mind.
- 2. The banner must be constructed of a material that allows the wind to flow easily through it. If the banner is made of vinyl, construction wind pockets must be cut into the banner, or we recommend the use of a 70 percent mesh material for banner construction.
- 3. Banners must have grommets horizontally along the top and bottom of the banner at a minimum of 18 inches to 2 foot intervals.
- 4. Banners must have grommets vertically placed along both sides of the banner at a minimum of 48 inches if the banner is 8 feet tall or greater.
- All edges of the banner will be folded over, glued and double stitched, and preferably webbing reinforced before installation of the grommets. All mesh banners must be webbingreinforced in between all folds before grommet installation.
- 6. The grommets in the corners will be reinforced due to this area handling most of the stress in the banner.
- 7. Banners must be made of lightweight materials.
- 8. The material should be water-resistant so there will not be a substantial increase in weight when it becomes wet.
- 9. All banners are subject to removal without notice in the event of SEVERE WEATHER NOTICE.

#### Hardware:

- 1. The manufacturer must rate all rigging hardware with a "Working Load Limit" (WLL).
- 2. The manufacturer of the rigging hardware must be legally liable for its products in the continental United States.
- 3. All wire rope slings 3/8" and larger must be certified and proof-tested (tested to twice its working load limit).
- 4. Flemish eye construction is preferred for all wire rope slings 3/8" and larger.
- 5. The OCCC Rigging department reserves the right to substitute hardware on a case-by-case basis at its discretion.

#### Manufactured or Custom Built Signs:

- 1. All signs must be well-made and in good condition to be suspended.
- 2. All drawings, diagrams, etc. must be submitted at least three weeks in advance of the event.
- 3. All signage is subject to on-site inspection for final approval.
- 4. An engineer's certification may be required under certain conditions.
- 5. All hardware and equipment must be approved by the manufacturer for overhead suspension.





# OCCC EXHIBITOR GAS, AIR & PLUMBING CONDITIONS

#### OCCC Compressed Air, Gas & Plumbing Conditions & Guidelines

- 1. Plumbing services are only available from the floor.
- 2. Compressed air pressure may vary. No guarantee can be made of minimum and maximum pressure. If pressure is critical, please contact Exhibitor Services at (407) 685-9824.
- 3. OCCC staff must perform any and all booth anchoring / drilling.
- 4. The OCCC will not branch/split gas from one location to another to achieve multiple locations. The OCCC is not responsible for gas distribution installed by others.
- 5. All gas will be removed or shut off one hour after the close of each day. LP gas prices include hook-up and dismantle of tank each day.
- 6. Please provide an attached drawing indicating location of your connection(s). If a drawing is not provided, the OCCC will install the service in the most convenient location and charges will apply for relocation.
- 7. Labor charges will apply for service calls.
- 8. All equipment must comply with the Southern Building Code, all Federal, State, and local safety codes.
- 9. Claims will NOT be considered unless filed by Exhibitor before the close of show at the OCCC Exhibitor Services desk.
- 10. All material and equipment furnished by the OCCC shall remain the property of the OCCC and shall be removed ONLY by the OCCC at the close of show.
- 11. The Center reserves the right to refuse connection to any exhibitor whose equipment is deemed unsafe the OCCC.
- 12. Unless otherwise directed, OCCC personnel are authorized to cut floor coverings to permit installation of service.
- 13. Obstructions and blocking utility floor boxes are subject to relocation as necessary.
- 14. The exhibitor must notify the OCCC Exhibitor Services desk for installation if no detailed diagram has been submitted indicating the location of the ordered services.



# OCCC EXHIBITOR EAC CONDITIONS

#### OCCC Exhibitor-Appointed Contractor (EAC) Guidelines

- 1. Freight deliveries, including, but not limited to: UPS, FedEx, RPS, GPS, etc. will not be accepted by the OCCC. Most carriers will not deliver to individual booths. Refer to your exhibitor manual or ask your show management for proper drayage instructions.
- 2. Adhesive-backed decals (stick-on) or similar items (except nametags) may not be distributed or used in the OCCC.
- 3. Cooking permits must be obtained from your exhibitor manual or show management, completed and accepted by the OCCC prior to any cooking activity. A 2A40 B.C. fire extinguisher must be in the booth, no more than thirty (30) feet from each cooking device. Exhibitor shall comply with all Orange County Health Department rules and regulations. Exhibits involving cooking or food preparation must provide a clean-up area or use those provided by show management. Disposal of cooking residue into the OCCC's drainage system is prohibited. Holding tanks for disposal of cooking residue (oil, grease, etc.) are required.
- 4. "Day tanks" of bottled gas may be used, during show hours, for cooking or demonstration purposes. Tanks must have a release valve and be removed from the OCCC, daily, at the close of event. At no time can tanks be stored in the OCCC. A 2A40 B.C. fire extinguisher must be in the booth, no more than thirty (30) feet from each cooking device.
- 5. If permitted by show management, exhibitor rigging services are available through OCCC Exhibitor Services. A rigging form should be included in your exhibitor kit. If not, check with show management before placing an order for this service. Decorations, signs, banners, etc., may not be taped, nailed, tacked, stapled or otherwise fastened to ceilings, walls, doors, windows, painted surfaces, or columns by exhibitors or their designee.
- 6. Exhibits or displays, equipment, stock or supplies will not be allowed to enter or leave by way of the front entrances of the OCCC.
- 7. Fog, smoke and special effect equipment is restricted to water based chemicals. Approval must be obtained from show management and the Orange County Fire Rescue Services Department through OCCC Event Coordination. Fog, smoke and special effect equipment must not be operated in areas where the effect could enter adjacent spaces, e.g., exhibition hall entrances, concourses, etc.
- 8. Food and beverages are not permitted on premises unless purchased through the OCCC's Food Service Partners or as an approved exhibit by the legal manufacturer and/or distributor. Food or beverages may not be brought in or delivered to the OCCC for personal consumption. Exhibitors planning to distribute food and beverages, whether manufacturer or distributor, must make advance arrangements with the OCCC's Food Service Partners.
- 9. Hazardous Work Areas During move-in and move-out, exhibition halls, loading docks, truck staging areas and service corridors are considered hazardous work areas. Alcoholic beverages, possession or use of controlled substances of any kind, horseplay, practical jokes, etc. are prohibited. Speeding or reckless use of vehicles or equipment is prohibited. Music or noise that may limit the audibility of back-up signals, fire alarms or emergency messages is prohibited. Children under 16 years of age are prohibited.
- 10. Holes may not be drilled, cored, or punched into any surfaces of the OCCC.
- 11. Multi-level and/or Covered Exhibits require firewatch personnel or an automatic extinguishing system and submittal of scaled, stamped plans. Guidelines are available through your exhibitor manual, show management or OCCC Event Management. Exhibitor will be charged for firewatch personnel per Orange County's fee schedules.
- 12. Painting signs, exhibits or other objects is not permitted in the OCCC.
- 13. Permits are required for booths and/or exhibitor activity that includes cooking, pyrotechnic, tent, welding or cutting and multi-level or covered booths or other potentially dangerous hazards. Each situation must be individually approved. Permit information may be obtained from your exhibitor manual, show management, or OCCC Event Coordination.
- 14. In compliance with the Florida Clean Air Act, Florida Statutes Sections 386.205 and 386.206, smoking is not permitted in any meeting room or public area; e.g., restrooms, concourses. Smoking is prohibited in exhibition halls during move-in and move-out. The Lessee or its general contractor shall post appropriate signage and enforce this policy.
- 15. Static helium balloon displays are permitted after filing a Balloons Agreement with OCCC Exhibitor Services department. Helium balloons may not be used as giveaways. Helium tank storage inside the OCCC is prohibited.
- 16. Tape used on exhibition hall floors must be low residue resistant carpet tape (Polyken 105C or Renfrew #147) and low residue safety tape (Asiachem SST-736 or approved equivalent). All tape must be removed from the floor and disposed of immediately after the event.
- 17. Vehicles that remain in the exhibition hall as part of a display must have the battery cables disconnected. The gas tank must either be taped shut or have a lockable gas cap and may contain no more than one-fourth (1/4) tank or 10 (ten) gallons of fuel, whichever is less.



# OCCC EXHIBITOR SECURITY INFORMATION

The OCCC maintains 24-hour security presence, 7 days a week. The OCCC Security Division is responsible for providing a safe and secure environment for everyone. Additionally, the Orange County Deputy Sheriff's Office has dedicated a squad of deputies to patrol the OCCC. The following guidelines are applicable at the OCCC:

- 1. All show management, exhibitors and attendees must wear an approved show management badge for admittance to any exhibit hall. We recommend show management provide badges to their staff, exhibitors and service providers in advance of the show. All other personnel working at the Center must be badged with an approved Show Management or OCCC badge.
- 2. Any person without an approved event badge or OCCC badge requesting access into the exhibit hall will be provided with a "Temporary Day Badge (TDB)" issued by OCCC Security. The locations for issuance of the "TDB" are West Building West Command Dock 7 and North/South Building North and/or South employee checkpoints. To obtain a TDB an approved form of photo identification (valid driver's license, passport, valid state, federal or military identification card) must be surrendered prior to issuance, and will be returned upon completion of the day.
- 3. OCCC Security maintains closed circuit TV monitoring of the OCCC to include parking lots and surrounding grounds.
- 4. Criminal background checks are conducted on all full-time and part-time OCCC employees as a condition of employment.
- 5. Security personnel will conduct random vehicle and package inspections.
- 6. The OCCC Security Division will assign an Event Security Liaison Officer to assist in the review of the event's contract security provider's plan to ensure all security needs are met and in compliance with OCCC requirements.
- 7. Should you require additional assistance, please contact OCCC Security.

#### Medical Emergencies & First Aid at the OCCC

In the event of a medical emergency while on-site at the Orange County Convention Center (OCCC), please do not call 911. The OCCC is extremely large and emergency personnel must be directed to the location of the incident as promptly as possible. This can only be achieved by directing the emergency through the Building Security Section. The following steps should be followed to ensure a timely response:

For Serious Medical Emergencies:

- In the West Building dial ext. 5-1119 from any house phone in the building and/or notify a uniformed security representative. Please have as much information about the emergency as possible (location, type of individual, nature of the emergency). Alert security to contact the paramedic on-site, if applicable.
- In the North/South Building dial ext. 5-7119 from any house phone in the building and/or notify a uniformed security representative. Please have as much information about the emergency as possible (location, type of individual, nature of the emergency). Alert security to contact the paramedic on-site, if applicable.
- Once security has been called, the Security Rep will respond to evaluate and stabilize until paramedics, if applicable, arrive and assess. Ambulance service will be provided by the paramedic service, if applicable.

For Minor Incidents/First Aid:

- For minor incidents in the West Building, notify the Building Security Section via any house phone in the building at ext. 5-9828 or 5-1128. In case of an emergency, dial ext. 5-1119.
- For minor incidents in the North/South Building, notify the Building Security Section via any house phone in the building at ext. 5-7102. In case of an emergency, dial ext. 5-7119.
- Notify uniformed security personnel or paramedic. Provide as much detailed information regarding the incident.

West Building Med Rooms:

- Med 1 In front of Hall D/2, across from W-Room 224
- Med 2 In front of Hall E, across from W-Rooms 230 & 231
- Med 3 In Central Lobby by Hall C
- Med 4 South Lobby Level 1

#### North/South Med Rooms:

- Med 5 South A Dock Side
- Med 6 South B Concourse Level 2
- Med 7 North B Dock Side
- Med 8 North A Concourse Level 2



# OCCC EXHIBITOR FIRE REGULATIONS

#### **Cooking Information**

A Cooking/Open Flame Agreement form must be obtained prior to any on-site cooking, and/or food warming activities on the premises. Cooking/Open Flame Agreement forms can be obtained via the OCCC Exhibitor Services division, which are then submitted for review and approval by the Orange County Fire Marshal's office.

The use of cooking appliances must be disclosed on the Cooking/Open Flame Agreement form. Each exhibit using cooking or food warming devices may be subject to an individual inspection. Cooking devices must be separated from the public by at least four feet, or by a substantial barrier between the devices and the public. In addition, a K-Class fire extinguisher must be in the cooking location, within thirty (30) feet of fryers and a 2A40BC fire extinguisher must be within thirty (30) feet of all cooking appliances. All fire extinguishers must be properly charged and tagged by a licensed fire extinguisher contractor.

Events involving cooking or food preparation must provide an appropriate number of utensil clean-up areas. Disposal of cooking residue into the OCCC drainage system is prohibited. Lessee shall provide holding tanks for disposal of all cooking residue (oil, grease, etc.) The OCCC has grease barrels and portable sink units available at the prevailing rates. Lessee shall also comply with all Orange County Health Department rules and regulations

#### Permitted Cooking Appliances Must Meet The Following Conditions:

- Equipment fueled by small heat sources (such as sterno).
- Flaming sword or other equipment involving open flames and flaming dishes provided that precautions (subject to the approval of the Orange County Fire Marshal) are taken. Prior approval from the Orange County Fire Marshal is required.
- Portable butane-fueled appliances (listed and approved for commercial use) with a maximum of two 10 oz. non-refillable containers. **Please Note:** The containers must be connected directly to the appliance. Manifolding of the cylinders is not permitted. The maximum number of stored butane containers is limited to 24. Prior approval from the Orange County Fire Marshal is required.
- Listed and approved ventless self-contained exhaust systems with an automatic suppression system that complies with NFPA 96 *Standard for Ventilation Control and Fire Protection of Commercial Cooking Operations.* Prior approval from the Orange County Fire Marshal is required.
- Cooking Appliances that Require Automatic Suppression and/or Flue Connection:
  - o Fryers
  - Grills, Ranges, Griddles, Broilers, Chain-broilers
  - o Ovens

Please Note: A firewatch may be provided in lieu of automatic suppression and/or flue connection with prior approval from the Orange County Fire Marshal.

#### Covered Booth Guidelines (Less than 300 Square Feet)

Please See Multi Level Guidelines Information Sheet

#### Facility Emergency Equipment

- Fire fighting and emergency equipment may not be hidden or obstructed, including fire extinguishers, strobes, fire hose cabinets and standpipes.
- All emergency exits, hallways and aisles leading from the OCCC must be kept clear and unobstructed.
- Fire lanes must be maintained at all times on the loading dock.

#### Flame Resistance Information

- All woodwork, stage scenery, furnishings, decorations and sets used upon a working permanent or temporary stage, or within an exhibit, shall be coated or treated by approved methods to render them flame resistant.
- All fabrics, films, draperies, curtains and similar furnishings must be flame resistant as demonstrated by testing in accordance with NFPA 701 Standard Methods of Fire Tests for Flame Propagation of Textiles and Films.
- Acoustical and decorative material including, but not limited to, cotton, foamed plastic, hay, paper, straw, wood chips, mulch, split bamboo and thatch must be treated with a flame-retardant.
- The use of Styrofoam products for set construction is not permitted.



• Documentation of flame resistance must be available for review upon request. Additional flame retardant treatments shall be applied in accordance with the appropriate product direction.

#### Gas Information

- The Exhibitor shall not bring upon the premises any exhibit, equipment or vehicle that, in the judgment of the OCCC, would be, or might be, dangerous to persons or property or otherwise incompatible with the structure, systems and furnishings. Hazardous chemicals and materials, including, but not limited to, pesticides, herbicides, poisons, flammable and combustible liquids, hazardous gases, pressure cylinders and tanks, and hazardous chemicals (including oxidizers) are prohibited inside the OCCC.
- Gasoline, kerosene, diesel fuel, combustible gases and other flammable liquids may not be stored (permanently or temporarily) in the OCCC during an event or its move-in and move-out activities.

#### Gas - Compressed/Inert

• Compressed inert gases may be used provided the vessels are stored in a safe manner and the OCCC Event Management department has been notified regarding their intended use and preferred storage location. Demonstrations involving inert gases must comply with all federal and local regulations.

#### **Inert Gas Cylinders**

- Compressed gas cylinders may not be stored on dock areas or the exhibit floor during "move-in" or "move-out".
- Compressed inert gas cylinders may be located in an exhibit space after "move-in" is complete. Cylinders must be properly secured at all times.
- Introduction of all other compressed liquids and gases into the building is prohibited without prior approval from the Fire Marshal.

#### Gas – Natural

- Equipment utilizing natural gas shall be installed in accordance with NFPA 54, Natural Fuel Gas Code.
- Supply lines will be turned on approximately one (1) hour prior to posted show hours and shut off one (1) hour after the end of each show day, by OCCC Event Utilities staff.
- A ceiling (rigging) drop is required for natural gas orders in exhibit halls. Exhibitor fee information and ordering information can be obtained from the Exhibitor Services division or via our website @ www.occc.net/exhibitor. **Please Note:** Exhibitors placing natural gas orders are to provide a "Service Placement Plot" drawing depicting exact placement of the requested line drop.

#### Gas – Liquid Petroleum (LP)

- Non-refillable cylinders with a capacity of nominal 1 lb.
- The use of portable butane fueled appliances listed for commercial use, up to maximum of (2) 10 oz. containers, is permitted with prior approval of the Fire Marshal.
- The use of nominal 5 lb. Liquid Petroleum containers, when installed in the OCCC by the Event Utilities division, is permitted with prior approval from the Fire Marshal. A mandatory fire watch is required.
- Multiple nominal 5 lb. Liquid Petroleum containers, when installed in the OCCC, must be separated by a minimum of 20 feet. Storage of the Liquid Petroleum product must comply with NFPA 58 Liquefied Petroleum Gas Code. A mandatory fire watch is required.
- All Liquid Petroleum must be removed from the display area at the immediate close of show hours.
- Any other Liquid Petroleum product not listed above is strictly prohibited.

#### Gas – Storage

• Gasoline, kerosene, diesel fuel, combustible gases (cylinders) or other flammable liquids may not be stored (permanently or temporarily) within the OCCC facility, or on dock areas, during an event or its move-in and move-out.

#### **Hazardous Chemicals**

- The Exhibitor shall not bring upon the premises any exhibit, equipment or vehicle that, in the judgment of the OCCC, would be, or might be, dangerous to persons or property, or otherwise incompatible with the structure, systems and furnishings of the building. Hazardous chemicals and materials, including, but not limited to, pesticides, herbicides, poisons, flammable and combustible liquids, hazardous gases, pressure cylinders and tanks, and hazardous chemicals (including oxidizers) are prohibited inside the OCCC.
- The Exhibitor is responsible for the removal of all hazardous waste and must comply with all applicable federal, state and local regulations. Hazardous waste includes materials that are ignitable, corrosive, reactive, toxic or a biohazard (as defined under 40 CFR 261 subpart C and D). If materials are questionable, contact OCCC Exhibitor Services for more information. Costs or



applicable administrative expenses incurred by the OCCC for the removal of hazardous waste left in, or about, the OCCC will be assessed to the Exhibitor.

#### Multi-Level Exhibits & Covered Booths Over 300 Square Feet

Please See Multi Level Guidelines Information Sheet

#### **Open Flame, Pyrotechnics and Special Effects**

#### **Open Flame**

- Open Flame and Flame Effects must comply with NFPA 160 Standard for Flame Effects Before An Audience.
- Depending on the intended use of an open flame product, a Special Effects permit may be required. Consult the OCCC Exhibitor Services department for further information and approval by the Orange County Fire Rescue Department.
- A demonstration of the open flame device may be required at the discretion of the Orange County Fire Marshal, while on OCCC premises.
- Depending on the intended use of an open flame product and the demonstration of an open flame device, a fire watch may be required.

#### Candles

- All candle flames must be enclosed and protected at all times.
- Candles may be used on tables if securely supported on a substantial noncombustible base and located in a position to avoid danger of ignition of combustible material.
- The OCCC Exhibit Services division and Orange County Fire Rescue must be notified in advance on the intended use of candles and candle product.

#### Pyrotechnics

- Pyrotechnics must comply with NFPA 1126 Standard for the Use of Pyrotechnics Before a Proximate Audience.
- A pyrotechnics permit is required. (Consult the OCCC Exhibitor Services division for further information and approval by the Orange County Fire Rescue Department.)
- A demonstration of the pyrotechnics display may be required at the discretion of the Orange County Fire Marshal.
- A mandatory fire watch will be required. A fire engine stand-by may be required, per the discretion of the Orange County Fire Marshal's office.

#### Special Effects – Fog & Hazers

- The use of fog and haze machines for lighting and theatrical effects is permitted within the OCCC, provided 1. that the exhibitor services coordinator be notified, and 2. that the fog/haze fluid used in those machines is water-based. The use of non-water-based fog/haze fluid, specifically with an oil-based composition, is prohibited.
- Orange County Fire Rescue guidelines will apply to the use of fog and haze machines and their interactions with OCCC building safety devices and/or detectors. Please consult the OCCC Exhibitor Services division for additional information regarding the use of fog and haze machines within the facility.

#### **Special Effects - Lasers**

- Lasers must comply with Florida Administrative Code Chapter 64E-4 Control of Nonionizing Radiation Hazards, NFPA 115 Standard for Laser Fire Protection, and Florida Department of Health, State Bureau of Radiation regulations.
- A Laser Permit from Orange County Fire Rescue Department is required. In order to apply for this permit, the requestor must provide information about the proposed laser light show that includes classification of the lasers; sketches indicating the location of the lasers, operators, performers, viewers, beam paths, viewing screens, walls, mirror balls and other reflective or diffuse surfaces which may be struck by any and all laser beams, including scanning beam patterns, scanning velocity and frequency in occupied areas.
- For open-air shows where a laser beam is projected into the sky, requestor must submit basic beam information of intended laser use and a copy of the notification provided to the Federal Aviation Administration.
- All lasers must be registered with the Florida Department of Health, State Bureau of Radiation. A separate registration is required for each location of intended use. Out-of-state lasers brought into the state for temporary use require notification to the Florida Dept. of Health, State Bureau of Radiation.
- The Laser Safety Officer must establish and supervise a program of laser radiation safety for compliance with all applicable rules.
- Laser system users and staff must be trained on fire safety features prior to the lasers first use and at least annually thereafter.
- Staff members must be trained in the use of portable fire extinguishers.
- All training must be documented and available for review.



# OCCC EXHIBITOR FIRE REGULATIONS

#### Permit Overview/Including Cooking Information

Special permits or notices are required for event activities and exhibits that involve cooking, pyrotechnics, tents, multi-level or covered exhibits, and/or potentially hazardous situations. Appropriate permit applications or notices for the following activities must be made to the Office of the Fire Marshal, at least twenty-one (21) days prior to the event move-in:

- The display and operation of any unusual electrical, mechanical or chemical device that may present a hazard. The device, its application and the operation must be approved the Fire Marshal.
- The display or operation of any heater, barbecue, open flame, candles, lamps, torches, etc.
- The use or storage of flammable liquids, compressed gasses or dangerous chemicals as determined by the Fire Marshal.
- The display or operation of a **laser**. A permit is required from Orange County Fire Rescue Department. Proper notification to the Florida State Bureau of Radiation is required. (See previous page for laser regulations and restrictions.)
- Any pyrotechnics, fireworks or special effects display or process.
- Any **unusual use of a motorized vehicle** inside an enclosed structure.
- Any special **cooking** requirements, including cooking inside of ballrooms, convention areas and/or display areas.
- Multi-level exhibit booths.
- Tents or covered exhibits in excess of 300 square feet erected inside the host facility.
- Tents erected OUTSIDE the OCCC building premises will require a permit issued by the Orange County Building Department.

#### **Vehicles**

- The show's security provider must conduct a mandatory vehicle inspection of each vehicle, prior to their entry into the exhibit hall.
- All fuel tank openings shall be locked and sealed to prevent escape of vapors. Fuel tanks may not contain more than onehalf capacity or ten (10) gallons of fuel whichever is less.
- At least one battery cable must be removed from the battery used to start the vehicle engine. The disconnected battery cable must be taped.
- Battery charging is not permitted in the exhibit hall, at any time.
- Converters may not be used in lieu of a battery to power the ignition source.
- Batteries used to power auxiliary equipment are permitted to be kept in service.
- Fueling or de-fueling of vehicles is prohibited.
- Vehicles may not be moved during show hours, unless the OCFR Fire Marshal approves the movement in advance and a Fire Watch is in place.
- Motor Homes, boats and similar exhibited products with over 100 sq. ft. of covered area must be protected with a listed smoke alarm.

#### <u>Welding</u>

• Welding and/or cutting equipment is prohibited in the OCCC except as part of an exhibit and must be approved by the Orange County Fire Rescue Services Department through the OCCC Event Services division.



**Covered Booth Definition**— To place something over or upon an exhibit or portion of an exhibit (e.g., roof, ceiling, tenting, lattice, fabric, plastic) to cover the ground level and/or support decorative structures. The upper portion of a "covered" exhibit is not occupiable.

**Multi-Level Booth Definition** – To construct a level or tier atop an exhibitor or portion of an exhibit, to be occupied by one (1) or more persons.

#### A. Guidelines for Covered Exhibits With Less Than Three Hundred (300) Covered Square Feet

- All materials used in the construction of covered exhibits and all decorative materials within the exhibit must be noncombustible or limited combustible (flame-retardant) materials. Certification of flame retardant treatment, along with samples of said materials, must be submitted, if requested by Orange County Fire Rescue Services Department. It is recommended certifications of flame retardant treatments be available at show site.
  Exhibitor must install a single station and battery operated smoke detector on the interior of each covered exhibit or structure regardless the square footage. The detector must sound an audible alarm and be installed per the manufacturer's instructions.
- 2) Exhibitor must provide at least one (1) 2-A, 10-BC portable, dry chemical fire extinguisher. Fire extinguisher(s) must be mounted in a visible location and be accessible at all times.
- B. Guidelines for Multi-level Exhibits (regardless the size) and Covered Exhibits With Larger Than Three Hundred (300) Covered Square Feet

Requests for construction of multi-level (regardless the size) or covered exhibits (larger than 300 square feet) must be reviewed by the OCCC Event Management department and Orange County Fire Rescue Services Department. To ensure success of your exhibit, please read and comply with the following guidelines:

- 1) Plans should be submitted before exhibit construction begins and must adhere to the following:
  - a. They must be scaled, signed and dated by a registered architect or engineer.
  - b. They must include the show name and dates.
  - c. They must include exhibitor's name and assigned booth number.
  - d. They must include directional information (i.e. indicate neighboring aisles and/or booth numbers).
  - e. They must indicate maximum exhibit height, within the booth. Height guidelines are established, per event, by show management. Refer to the Exhibitor's Manual for applicable guidelines.
- 2) Send two (2) copies of scaled, signed and dated blue prints (with front and side elevations), by a registered architect or engineer, to:

Orange County Convention Center Attn: Event Management **Regular Mail:** PO Box 691509, Orlando, FL 32869 **Overnight:** 9860 Universal Boulevard, Orlando, FL 32819

- 3) All materials used in the construction of multi-level and/or covered exhibits and all decorative materials within the exhibit must be non-combustible or limited combustible (flame-retardant) materials. If requested, certification of flame-retardant treatment, along with samples of said materials, must be submitted to Orange County Fire Rescue Services Department. It is recommended certifications of flame retardant treatments be available at show site.
- 4) The upper deck of multi-level exhibits, if larger than three hundred (300) square feet, shall meet the following requirements:
  - a. Upper level may not have a "cover" of any kind (e.g., roof, ceiling, tenting, lattice, fabric and plastic).
  - b. Exhibits with an enclosed room or occupied second story must post notice at the bottom of the stairway, indicating maximum permitted occupancy (or total permitted weight load of the second level).
  - c. If second level is to be occupied and greater than three hundred (300) square feet, two (2) stairways are required, remote from each other. If second level is to be occupied and less than three hundred (300) square feet, one (1) set of stairs is permitted. All stairs must be a minimum of three feet (3') in width, equipped with a handrail on at least one (1) side and constitute a "straight run" or be "squared off." Spiral stairs or winders are not permitted.



- d. Individual areas of upper decks or covered areas must be limited to dimensions that do not exceed one thousand (1,000) square feet.
- e. If the upper deck, or covered area, is greater than one thousand (1,000) square feet, a clear fire break (unobstructed aisle), of not less than ten feet (10') must be provided on all four (4) sides of each one thousand (1,000) foot area. To avoid transfer of fire to another area, the firebreak (unobstructed aisle) shall not contain displays, furniture, or other materials.
- f. The ten foot (10') clear space may be spanned by an overhead bridge or canopy which must not exceed four feet (4') in width. The bridge or canopy must be constructed of non-combustible materials.
- g. Exhibitor must install a single station and battery operated smoke detector on the interior of each covered exhibit or structure regardless the square footage. The detector must sound an audible alarm and be installed per manufacturer's instructions
- h. Exhibitor must provide a portable, dry chemical fire extinguisher for each level or each covered exhibit or structure. At least one (1) 2-A, 10-BC portable type fire extinguisher must be provided for each three hundred (300) square feet. Fire extinguishers must be mounted in a visible location, near exit doors, and be accessible at all times.

#### C. Required Fire Watch Personnel

- Orange County Fire Rescue Services Department requires firewatch personnel for:
- ALL multi-level exhibits (regardless of the square footage) and
- All other covered exhibits exceeding three hundred (300) square feet.

The following guidelines apply:

The exhibitor is required to order firewatch personnel through the OCCC Event Management department no less than two (2) weeks before the show moves in. Firewatch is required:

- a. For ALL multi-level exhibits (regardless of the square footage) and all other covered exhibits exceeding three hundred (300) square feet.
- b. On all show days
- c. Beginning one half (1/2) hour prior to show opening and ending one half (1/2) hour following show closing. Fire watch personnel are charged at the prevailing rate.
- d. To place order, contact: the OCCC Event Management department. Phone: (407) 685-9882 Fax: (407) 685-9866

### D. Alternative to Fire Watch Personnel (Automatic Extinguishing System)


This alternative to fire watch personnel applies to the first level of exhibits with an occupiable second level, regardless the size and/or single-story covered exhibits where the covered area exceeds three hundred (300) square feet.

- 1) Automatic sprinkler systems must be designed in accordance with N.F.P.A. 13 1991 Edition.
- 2) These systems may be connected to the Convention Center's existing standpipe system and in some cases, the domestic water supply. Connections to water systems must be made by the Orange County Convention Center.
- 3) Extinguishing system designs must be part of the original plan submissions. Orange County Fire Rescue Services Department requires permitting and testing.
- 4) Exhibits or structures protected by an automatic extinguishing system must have flow alarm, audible and visual, within that area. This alarm is to be a local type, sounding in the vicinity of the exhibit or structure.
- 5) Exhibitor must install at least one (1) single station, battery operated smoke detector on the interior of each covered exhibit or structure regardless the square footage. The detector must have an audible alarm and be installed per the manufacturer's instructions.
- 6) Exhibitor must provide a portable, dry chemical fire extinguisher for each level or each covered exhibit/structure. At least one (1) 2-A, 10-BC portable type fire extinguisher must be provided for each three hundred (300) square feet. Fire extinguishers must be mounted in a visible location, near exit doors, and be accessible at all times.



## OCCC EXHIBITOR COVERED & MULTI-LEVEL BOOTH CONDITIONS

If you have questions regarding these <u>guidelines</u>, contact: Event Management Orange County Convention Center Phone: (407) 685-9882 Fax: (407) 685-9866 If you have questions regarding <u>Fire Code</u>, contact: Orange County Fire Rescue Services Department Phone: (407) 685-9811 Fax : (407) 685-9866

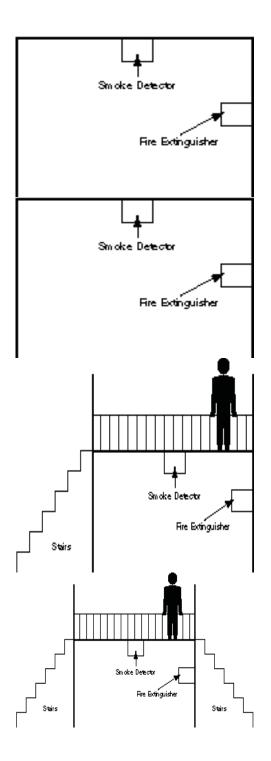

**Covered Exhibits** 299 sq. ft. or less

- Firewatch or Extinguishing System Not Required
- All Booths to be Constructed as Required by Applicable Codes and Standards

**Covered Booth, Tent and Theatre** 300 sq. ft. to1,000 sq. ft. - maximum allowed

- Firewatch or Extinguishing System <u>Required</u>
- All Booths to be Constructed as Required by Applicable Codes and Standards

Multi-Level Exhibits 299 sq. ft. or less

- Firewatch or Extinguishing System Required
- Minimum <u>1 Stair</u> Required
- All Booths to be Constructed as Required by Applicable Codes and Standards

#### **Multi-Level Exhibits**

300 sq. ft. to 900 sq. ft. - maximum allowed

- Firewatch or Extinguishing System Required
- Minimum <u>2 Stairs</u> Required
- All Booths to be Constructed as Required by Applicable Codes and Standards



## **ORANGE COUNTY FIRE RESCUE DEPARTMENT (OCFRD) TENT STANDARD 6000**

This Standard operates under the authority of Orange County, Florida Ordinance and State Statutes.

## 1.1 Scope

This standard covers all tents and membrane structures having an area in excess of 200 square feet or canopies having an area in excess of 400 square feet. Temporary membrane structures, tents, or canopy structures used exclusively for camping and structures located on the private property of one or two family detached dwellings are exempt from the requirements of this standard.

1.1.1 When the term tent is used, it also applies to membrane structures.

## 1.2 Appeal

If a party is not satisfied with a decision of the Fire Marshal, an appeal may be made to the Orange County Fire and Life Safety Board of Appeals, as provided by State Law.

### 2. Plans and Specifications

2.1 A scaled or dimensioned floor plan identifying furnishings, exhibits, pipe and drape, exiting, exit widths, aisles, seating, tables, fire alarm or public address systems, emergency and exit lighting, HVAC units, emergency power sources, and panic hardware shall be provided to the Orange County Fire Marshal's Office at the time of permit submittal.

2.2 All applications for tent permits shall include a scaled or dimensioned site plan indicating the location of the tent(s), distances from other buildings, and vehicular access.

2.3 Stages and platforms must not exceed their allowable load limits. The minimum load limit design of stages or platforms shall be a minimum of 100 pounds per square foot (PSF).

2.4 Seating for assembly use accommodating more than 200 persons shall be fastened together in groups of not less than three (3) and not exceeding seven (7).

2.5 Documentation shall be provided that all tent fabric meets the requirements of NFPA 701, *Standard Methods of Fire Tests for Flame-Resistant Textiles and Films*.

2.6 Covered booths and/or multi-level booths are not permitted without prior review and approval by the Fire Marshal.

2.7 A scaled layout shall be provided for all tents used for the sale of pyrotechnics.

2.8 Main Aisles in assembly occupancies in large tents, as defined in this section, aisle widths shall at no time be less than outlined in Table 2.9.1 under **Alternate requirements**:

#### Large Tents

• A single tents or combination of tents with only one multi-purpose room of 12,000 square feet or more;



the

- Multi-purpose tents used as a mixed occupancy or assembly with occupant loads exceeding 300;
- Tents more than 4,500 square feet used for exhibit or display;
- All other tents that do not meet the definition of Small Tents;

**2.9** Main aisles in assembly occupancies in small tents, as defined in this section, aisle widths shall at no time be less than aisle dimensions outlined in Table 2.9.1 under **NFPA 101 requirements**.

#### Small Tents

2.9.1

- A single tent or combination of tents with only one multi-purpose room of less than 12,000 square feet that is not being used for exhibition/display or part of a mixed occupancy;
- Multi-purpose tents used as a mixed occupancy or assembly with occupant loads less than 300;
- Tents less than 4,500 square feet used for exhibit or display.

Aisles	NFPA 101	*Alternate
Classroom	63" (44+19)	85" (66+19)
Banquet	82" (44+19+19)	104" (66+19+19)
General Session	44"	66"
Exhibits	44″	66"
1 5	es - Provide aisles such that door does not exceed 36 f	t the maximum travel distance from any point to t feet.

2.10 Rows of seating served by aisles or doorways at both ends shall not exceed 100 seats per row. The 12" minimum clear width of aisle access way between such rows shall be increased by 0.3 inches for every seat over a total of 14 as outlined in Table 2.10.3, but shall not be required to exceed 22 inches.

2.10.1 Rows of seating served by an aisle or doorway at one end only shall have a path of travel not exceeding 30 ft. in length from any seat to an aisle. The clear width of aisle access way between such rows shall be in accordance with Table 2.10.3.

2.10.2 Aisle access ways serving seating for Classroom, Banquet or General Session floor plans shall comply with Table 2.10.3.

2.10.3		
Aisle Access ways	NFPA 101	
Classroom	36" (average)	
Banquet	56" (average)	
General session 14 seats per row	12"	
General session >14 seats per row	12" + 0.3" each chair (max 22")	
General Session Dead-end 7 per row	12"	
General Session Dead-end > 7 per row	12"+ 0.6" each chair	
(Note: dead-end rows may not exceed 30 feet)		

2.11 If approval of the set-up of the tent/membrane structure is not received by the Orange County Fire Marshal's Office, the structure cannot be occupied.



2.11.1 The tent company who permits the tent/membrane structure must contact the Orange County Fire Marshal's Office for a fire safety inspection of the structure at least one business day prior to the show or event beginning.

2.11.2 Tent/membrane structure permit applications must be submitted to the Orange County Building Division, Zoning Department, and Fire Marshal's Office in a timely manner, with all the pertinent information outlined in this Standard, for the county departments to successfully provide approval prior to the date of the tent set-up. It is strongly recommended that for larger tent/membrane structures that a pre-construction meeting be requested through the Orange County Fire Rescue Departments' Office of the Fire Marshal.

### 3. Location and Spacing

3.1 All tents and membrane structures must have a minimum of 20 ft. clearance from exterior obstructions to provide an area to be used as a means of emergency egress by the occupants and access by emergency personnel. Tents may be attached together as long as the perimeter around the structures complies with this section.

3.2 Tops of tent stakes shall be blunt. If the stakes are not blunt, they shall be covered so as to prevent injury.

3.2.1 All stake lines adjacent to exits shall be visible.

### 4. Exits

4.1 There shall be a minimum of two (2) separate exits from any point in the structure where the occupant load is less than 500 persons. Where occupant loads are between 500 and 999 persons there shall be a minimum of three (3) separate exit doors from any point in the structure. Where occupant loads are 1,000 persons or greater there shall be a minimum of four (4) separate exit doors from any point in the structure.

4.2 The number of required exits and their exit widths for assembly occupancies in large tents, as defined in section 2.8 of this standard, will be based on the alternate method of protection and must be increased based on 1.5 times the calculated occupant load. Egress widths and number of exits is based on calculated occupant load for the size of the tent or the documented maximum occupant load identified by the property management.

4.3 The number of required exits and their exit widths for assembly occupancies in small tents, as defined in section 2.9 of this standard, will not be based on the alternate method of protection and will be as specified in NFPA 101 on the calculated occupant load.

4.4 There shall not be changes of elevations in excess of one-half (1/2) inch at exits. Any changes of elevations at exits must be in compliance with NFPA 101 and provided with the appropriate stairs or ramps.

4.5 Panic hardware or an approved equivalent must be provided on all exit doors that are lockable.



4.6 Exit doors are required to be placed at a distance from one another not less than one-half (1/2) the length of the maximum overall diagonal dimension of the structure or area served, measured in a straight line between the nearest edge of the exit doors.

4.6.1 Exits shall remain accessible and unobstructed while the tent is occupied.

4.6.2 If exits are covered while the tent is occupied; tent flaps or canvas curtains shall be arranged so that when opened they can readily be moved to the sides so that they create an unobstructed opening in the tent wall of the minimum width and height required for door openings.

4.6.3 Exits shall be designed and arranged to be clearly recognizable and distinctly marked as a means of egress.

4.7 If fencing, barricade, or similar material is installed around the perimeter of a tent, that portion that would cover the exits when the tent is not occupied shall be a separate piece and removed when the tent is occupied as defined in NFPA 101, 7.2.1.1.3.

4.8 For assembly occupancies in large tents as defined in section 2.8 of this standard, exits shall be so arranged that no point within the tent is more than 100' from an exit.

Exception: No point within a tent used for the sale of pyrotechnics shall be more than 50' from an exit.

4.8.1 For assembly occupancies in small tents as defined in section 2.9 of this standard; exits shall be so arranged that no point within the tent is more than 150' from an exit. Exception: No point within a tent used for the sale of pyrotechnics shall be more than 50' from an exit.

4.9 Exits shall be clearly marked with externally illuminated exit signs. Private party tents not exceeding 1,200 square feet shall not be required to have illumination in accordance with this section.

4.9.1 Directional exit signs if required shall be provided in accordance with NFPA 101, 7.10.

4.9.2 Exits, exit access, and exit discharge shall be illuminated at all times. Emergency lighting shall be provided as required by NFPA 101. Private party tents not exceeding 1,200 square feet shall not be required to have illumination in accordance with this section.

## 5. Occupant Load

5.1.1 The occupant load shall be posted in all tents used for assembly purposes, regardless of occupant load.

5.1.2 Occupant loads shall be calculated by the square footage of the structure multiplied by 7 sq. ft per person for concentrated use (general session, classroom, reception) or 15 sq. ft. per person for less concentrated use (exhibits or banquet). Maximum occupant loads may be proposed to the Fire Marshal based on written documentation.

## 6. Cooking and Heating Equipment



6.1 Cooking is not permitted without prior review and approval by the Orange County Fire Marshal. Temporary and limited heating of food products by sterno is acceptable when contained in a noncombustible container and constantly attended and supervised.

6.2 HVAC equipment if installed, shall comply with the Florida Mechanical Code and the appropriate NFPA Standard.

## 7. Fire Hazards

7.1 No storage or handling of flammable or combustible liquids or gases shall be permitted at any location where it could jeopardize egress from the tent.

7.2 Refueling of equipment shall not be permitted inside a tent.

7.3 The ground enclosed by any tent and a minimum of 10'-0" outside of such tent shall be cleared of all flammable or combustible material or vegetation and the premises shall be kept free of such during the use of the tent. Live landscaping is exempt from the requirements of this section.

7.4 Decorative or acoustical materials as outlined in NFPA 1, 13.7.4.3.6 such as hay, paper, straw, wood chips, shavings, foams, and plastics are strictly prohibited unless flame retardant and approved by the Orange County Fire Marshal's Office.

7.5 Open flames are not permitted without prior review and approval by the Orange County Fire Marshal.

7.6 Pyrotechnics are not permitted without prior review and approval by the Orange County Fire Marshal.

7.7 Vehicle parking or display in the structures is not permitted without prior review and approval by the Orange County Fire Marshal.

7.8 Smoking is prohibited unless previously approved by the Orange County Fire Marshal's Office.

7.8.1 "No Smoking" signs shall be posted throughout the tent and outside of each entrance/exit.

### 8. Fire Extinguishers

8.1.1 A minimum 2A10BC dry chemical fire extinguisher shall be provided within 75'-0" of any point in the structure.

Exception: Where a functioning garden hose that can reach all portions of the private tent, that does not exceed 1,200 square feet, is provided

### 9. Fire Alarm and Emergency Communications

9.1 Tents used for assembly use with an occupant load of 300 or more people shall provide a fire alarm system, public address system with constantly attended location, or an alternate method of protection approved by the Orange County Fire Marshal's Office. An acceptable method of emergency forces notification shall be provided satisfactory to the Fire Marshal. Tents without sides that are open, accessible, and unobstructed on all sides at all times shall be exempt from the requirements of section 9.1 unless specifically mandated by the Fire Marshal.



## **10. Electrical Installations**

10.1 Electrical installations shall comply with NFPA 70, National Electrical Code.

## 11. Crowd Managers and Orange County Fire Department Fire Watch

11.1.1 Trained Crowd Managers, with a means of emergency forces notification, shall be provided for all events at a ratio of 1 to 250 people. When occupant loads exceed 250 individuals, additional trained crowd managers or crowd manager supervisors shall be provided at a ratio of 1 for every 250 occupants..

11.1.2 The Fire Marshal shall have the authority to require Orange County Fire Department Standby Fire Personnel, emergency response equipment, or an approved fire watch when potentially hazardous conditions or a reduction in a life safety feature exist due to the type of performance, display, exhibit, occupancy, contest or activity, an impairment to a fire protection feature, or the number of persons present.

11.1.3 One (1) Orange County Fire Department Fire Watch Personnel with a means of emergency forces notification shall be provided when actual occupant loads exceed 1,000 individuals in addition to the crowd manager requirements of 11.1.1.

### **12. Special Requirements**

12.1 An Orange County Fire Rescue Department's Special Event Permit is required for all events inside of tents that are being used for exhibition or display purposes. The tent company shall provide general floor plans and the OCFRD tent checklists. The hotels or event coordinator shall submit specific floor plans.

12.2 An Orange County Fire Rescue Department's Special Event Permit is not required for events inside of tents such as banquet, reception, classroom or general session settings. The tent company shall provide general floor plans and the Orange County Fire Rescue Department's tent checklist.