



**CPMAACDFL**

**CONVENTION+TRADE SHOW  
EXPO-CONGRÈS VANCOUVER 2018**

April 24 - 26, 2018

Vancouver Convention Center - West Building

Vancouver, Canada

Order Closing Date: April 6th, 2018

**REMIT TO:**  
**Lowe Refrigeration, Inc.**  
 105 Cecil Court  
 Fayetteville, GA 30214  
 USA  
 Tel: (770) 461-9001  
 Fax: (770) 461-8020  
 Email: info@LoweUSA.com  
**www.LoweUSA.com**

NAME OF EXHIBITOR				BOOTH #	
ADDRESS					
CITY		STATE	ZIP	COUNTRY	
PHONE #			FAX #		
ORDER CONTACT NAME			EMAIL ADDRESS		

**NOTE: 3% Processing Fee Applied to ALL Orders**

**\*NO REFUNDS FOR CANCELLATION AFTER CLOSING DATE**

**R  
E  
F  
R  
I  
G  
E  
R  
A  
T  
E  
D**

MODEL	SIZE & DESCRIPTION	QTY	RENTAL \$	TOTAL \$
B CORNER	90 Degree Corner Euro Deli Display		1850	
B1	4ft Euro Deli Curved Glass Display With Refrigerated Under Storage		1850	
B2	6ft Euro Deli Curved Glass Display With Refrigerated Under Storage		2050	
B3	8ft Euro Deli Curved Glass Display With Refrigerated Under Storage		2350	
B1 L/G	4ft Euro Deli <b>Self-Service</b> Display With Refrigerated Under Storage		1850	
B2 L/G	6ft Euro Deli <b>Self-Service</b> Display With Refrigerated Under Storage		2050	
B3 L/G	8ft Euro Deli <b>Self-Service</b> Display With Refrigerated Under Storage		2350	
B1P	4ft Euro Bakery Curved Glass Display With Pull-Out Drawer		1850	
BOD1	23" Glass Door Wine Display - Holds 96 Size 75 Bottles		1260	
BOD2	43" Double Glass Door Wine Display - Holds 208 Size 75 Bottles		1850	
C1	3.5ft Euro Merchandiser 4 Shelf Display (extra shelves \$20each /Qty _____)		1750	
C2	4ft Euro Merchandiser 4 Shelf Display (extra shelves \$25each /Qty _____)		1850	
C3	6ft Euro Merchandiser 4 Shelf Display (extra shelves \$30each /Qty _____)		2050	
F2 CHILLER	64" Sliding Lid Refrigerator		700	
G4T	30" Single Glass Door Refrigerator		900	
G6T	54" Double Glass Door Refrigerator		1575	
G223	2 Bowl Drink Dispenser (23 Liters / 6.3 Gallons Total Capacity)		600	
GENOVA 1	42" Refrigerated Open Front Merchandiser		1750	
GENOVA 2	54" Refrigerated Open Front Merchandiser		1850	
H1	4 cu-ft Storage Refrigerator		250	
ISOLA 4	56" Cold Buffet Style Display (Stainless Steel Available Upon Request)		1650	
ISOLA 6	81" Cold Buffet Style Display (Stainless Steel Available Upon Request)		1850	
JINNY 104	3ft Slim-Line Deli Curved Glass Display With Refrigerated Under Storage		1575	
JINNY 150	5ft Slim-Line Deli Curved Glass Display With Refrigerated Under Storage		1800	
JINNY 250	8ft Slim-Line Deli Curved Glass Display With Refrigerated Under Storage		2300	
K2T	4 Sided Glass Display With 16.5" Rotating Shelves		1700	
K2TF	4 Sided Glass Display With Wire Shelves		1700	
K2TWR	4 Sided Glass Display With Wood Finish & 22" Rotating Shelves		1700	
K2TWF	4 Sided Glass Display With Wood Finish & Fixed Shelves		1700	
K2TWCR	4 Sided Glass CANDY Display With Wood Finish & 22" Rotating Shelves		1700	
K2TWCF	4 Sided Glass CANDY Display With Wood Finish & Fixed Shelves		1700	
K3T	6 Sided Glass Display With 22" Rotating Shelves		1750	
KUBO 500R	60" Double Glass Door Display Refrigerator		1750	
L1	55" Euro Bakery Display With Dual Temperature Zones & Pull Out Drawer		1650	
L3	87" Euro Bakery Display With Dual Temperature Zones & Pull Out Drawer		2000	
L5	114" Euro Bakery Display With Dual Temperature Zones & Pull Out Drawer		2250	
L1HARMONY	37" Euro Bakery Display With 3 Fixed Shelves & Lighting On Each Shelf		1650	
L3HARMONY	52.5" Euro Bakery Display With 3 Fixed Shelves & Lighting On Each Shelf		1850	
MANDY 100	40" Open Front Merchandiser 3 Adjustable Shelf Display		1575	
MEMPHIS 90	36" Dual Temperature Zone Merchandiser Display		1650	
MEMPHIS 120	48" Dual Temperature Zone Merchandiser Display		1750	
OASIS 1	43" Square Island Display With Wood Finish & Suitable For Ice		1750	
OASIS 2	55" Square Island Display With Wood Finish & Suitable For Ice		1950	
P360	55" Grab & Go Island Display		1850	
PREP 1	41.5" Stainless Steel Refrigerated Prep Counter		900	
PREP 2	67.5" Stainless Steel Refrigerated Prep Counter		1325	
SARA	4ft Open Front Merchandiser 3 Adjustable Shelf Display		1700	
STARLET	24" Counter Top Refrigerator		450	
V-150	56" Curved Glass Bakery Display With Adjustable Shelves		1500	
V-200	74" Curved Glass Bakery Display With Adjustable Shelves		1950	

PAGE 1 SUBTOTAL

OFFICE USE ONLY IC BB O#

REV 11/13

PAGE 1 OF 2



**CPMA ACDFL**

**CONVENTION+TRADE SHOW  
EXPO-CONGRÈS VANCOUVER 2018**

April 24 - 26, 2018  
Vancouver Convention Centre - West Building  
Vancouver, Canada

Order Closing Date: April 6th, 2018

REMIT TO:  
**Lowe Refrigeration, Inc.**  
105 Cecil Court  
Fayetteville, GA 30214  
USA  
Tel: (770) 461-9001  
Fax: (770) 461-8020  
Email: info@LoweUSA.com  
**www.LoweUSA.com**

**PRODUCT INSURANCE IS THE RESPONSIBILITY OF THE EXHIBITOR. CHARGES INCLUDE DELIVERY, INSTALLATION, COLLECTION, AND MAINTENANCE DURING THE**

SPECIAL REQUEST:

**PAYMENT IS REQUIRED PRIOR TO CLOSING DATE. EQUIPMENT WILL NOT BE INSTALLED UNLESS PAYMENT HAS BEEN RECEIVED. ADDITIONAL 10% WILL BE APPLIED TO ALL ORDERS RECEIVED AFTER THE CLOSING DATE.**

NOTE: 3% Processing Fee Applied to ALL Orders

\*NO REFUNDS FOR CANCELLATION AFTER CLOSING DATE

	MODEL	SIZE & DESCRIPTION	QTY	RENTAL \$	TOTAL \$
<b>H O T</b>	200H	35.5" Counter Top Hot Self-Service Display		630	
	B1H	4ft Euro Hot Curved Glass Display With Steam Deck (Bars with Pans by Req		1850	
	BR13H	53" Curved Glass Hot Display With 3 Adjustable Shelves		1850	
	CO25	Convection Oven With Stand - Fits 1/2 Size Trays		700	
	DW	13" 2 Lamp Display Warmer (Pan by Request)		125	
	HSD2	36" Aluminum Heat Shelf		700	
	ISOLA 4H	56" Hot Bain Marie Buffet Style Display		1850	
	MCT	60" Mobile 4 Burner Cook Top		800	
	MCT-M	60" Mobile 4 Burner Cook Top With Display Mirror		825	
	MW	Microwave		250	
	TOP2	23" Counter Top Dual Burner Cook Top		150	
<b>F R O Z E N</b>	200GBT	48" Counter Top Display Freezer		650	
	B2F	6ft Euro Curved Glass Display Freezer		2050	
	D1C	58" Wall Site Display Freezer With 5 Baskets		1500	
	DC8	8 Well Ice Cream Dipping Cabinet		1575	
	DC12	12 Well Ice Cream Dipping Cabinet		2350	
	E1	5ft Wall Site Display Freezer		1700	
	E2	7ft Wall Site Display Freezer		1900	
	E3	6ft Wall Site Display Freezer with Side Visibility		1900	
	E4	6ft Wall Site Display Freezer		1900	
	F2	47" Sliding Glass Top Freezer With 1 Basket		700	
	G1T	30" Single Glass Door Freezer		1325	
	G6FT	54" Double Glass Door Freezer		1750	
	G12	54" Gelato Ice Cream Cabinet		2050	
	H2	4 cu-ft Storage Freezer		300	
	H4IB	24" Counter Top Display Freezer		500	
	K1T	24" 4 Sided Glass Display Freezer With Fixed Shelves		1700	
	K4T	27.5" 4 Sided Glass Display Freezer With 18" Rotating Shelves		1700	
	K4TF	27.5" 4 Sided Glass Display Freezer With Fixed Shelves		1700	
	KUBO 500F	60" Double Glass Door Display Freezer		1900	
	PENGUIN 1	Single Bowl Frozen Drink Display		450	
PENGUIN 2	Double Bowl Frozen Drink Display		600		
VV17	60.5" Double Glass Door Freezer		1850		
SS2P	52" Two Flavor Soft Serve Ice Cream Machine		1850		
<b>D R Y</b>	200DRY	35" Counter Top Dry Display		450	
	HWS	2 Person Hand Washing Station		450	
	I1	40" Insulated Ice Tray With Drain Plug		275	
	I3	64" Insulated Ice Tray With Drain Plug		300	
	MS12	23" Electric Meat Slicer		525	
	MSU	39.5" Mobile Hand Washing Sink		525	
	PT4	4ft Stainless-Steel Prep Table (Add Bottom Shelf \$50.00 check here)		160	
	PT5	5ft Stainless-Steel Prep Table (Add Bottom Shelf \$50.00 check here)		185	
	PT6	6ft Stainless-Steel Prep Table (Add Bottom Shelf \$50.00 check here)		225	
	SSB1	23.5" Stainless-Steel Single-Bowl Sink (PLUMBING REQUIRED)		250	
SSB3	83" Stainless-Steel Three-Bowl Sink (PLUMBING REQUIRED)		370		

PAYMENT TYPE:  CHECK  BANK WIRE  VISA  MASTERCARD  DINER'S CLUB  AMEX

PAGE 2 SUBTOTAL

CREDIT CARD #	EXP. DATE
NAME ON CARD	SECURITY CODE

PAGE 1 SUBTOTAL

**SIGNING BELOW COMPLETES YOUR ORDER AND IS ACCEPTANCE OF OUR RENTAL TERMS & CONDITIONS AVAILABLE FROM THE ABOVE OFFICE OR www.LoweUSA.com**

MISC.

EQUIPMENT TOTAL

PROCESSING FEE 3%

TOTAL

RENTAL TAX 0%

**GRAND TOTAL US \$**

PAGE 1 CONTACT NAME SIGNATURE

OFFICE USE ONLY IC BB O# INV#



# Equipment Accessories

105 Cecil Court  
 Fayetteville, GA 30214  
 Phone: 770-461-9001  
 Fax: 770-461-8020

Company Name: \_\_\_\_\_ Booth # \_\_\_\_\_  
 Show Name: \_\_\_\_\_

## Optional Accessories

Description	Cost	Quantity
Mandy Peg Bar	\$15.00	
Mandy Pegs	\$1.00	
Mandy Shelf Circle:Top/Middle/Bottom	\$15.00	
Sara Peg Bar	\$25.00	
Sara Pegs	\$1.00	
Sara Shelf Circle:Top/Middle/Bottom	\$25.00	
C1 Peg bar	\$20.00	
C2 Peg Bar	\$25.00	
C3 Peg Bar	\$30.00	
C Pegs	\$1.00	
C1 Shelf	\$20.00	
C2 Shelf	\$25.00	
C3 Shelf	\$30.00	
Gen 1 Peg Bar	\$20.00	
Gen 2 Peg Bar	\$25.00	
Gen Pegs	\$1.00	
Gen 1 Shelf	\$20.00	
Gen 2 Shelf	\$25.00	
CO25 Sheet Pans (For stand)	\$20.00	
CO25 Trays	\$15.00	
Isola or B1H 1/4 Size Gastronorm Pan	\$20.00	
Isola or B1H 1/3 Size Gastronorm Pan	\$25.00	
Isola or B1H 1/2 Size Gastronorm Pan	\$30.00	
Isola or B1H Full Size Gastronorm Pan	\$60.00	

## Optional Accessories at no Extra Charge

Description	Quantity
B1 Ice Insert	
B2 Ice Insert	
B3 Ice Insert	
B Corner Ice Insert	
Jinny 104 Ice Insert	
Jinny 150 Ice Insert	
Jinny 250 Ice Insert	
P-360 Ice Insert	
C1 Product Stoppers	
C2 Product Stoppers	
C3 Product Stoppers	
Gen 1 Product Stoppers	
Gen 2 Product Stoppers	
Sara Product Stoppers	
DW Pan	

Total Cost of Accessories:

\$ \_\_\_\_\_

**Please add total cost of Accessories to  
 Misc. section on the Show Order Form.**

**Please Note: Supply of the above equipment cannot take place without this form being completed and returned to Lowe Refrigeration Inc.**

RENTAL  
EQUIPMENT

TRADE SHOW  
& EVENTS



# LOWE

WORLDWIDE RENTAL SPECIALISTS



Worldwide  
Rental Specialists In  
Refrigerated, Frozen  
& Hot Equipment

## ABOUT US

Lowe Refrigeration, Inc opened in 1990 as an extension of our European Company for support of the trade show/convention industry in the United States. We have since provided our services beyond our Contracted Shows to include Non-Contracted Shows and Special Events. Lowe Refrigeration's equipment is housed in our Fayetteville, GA facility located approximately 20 miles south of Atlanta's Hartsfield Jackson International Airport. All orders are processed through this facility along with any required maintenance and repairs to our fleet of equipment. We have a complete inventory of spare parts and components which allows us to maintain the technical condition and cosmetic appearance of our equipment to the very high standards expected by our clients. With over 30 years of experience in refrigerations sales, exhibition, event, and corporate refrigeration rental, you can be certain that we will have the answers to all of your refrigeration requirements.

## SERVICES

### Contracted Shows:

Since 1990, Lowe Refrigeration, Inc. has been the show appointed "refrigeration contractor" shipping refrigerated display cases to the major food tradeshow across the United States. Lowe Refrigeration's staff are always onsite to offer the technical support and service necessary to ensure the success of your display. Order forms and color brochures are included in the tradeshow kits and can also be found on the show website as well as the Lowe Refrigeration website under "Trade Show Order Forms".

### Non-Contracted Shows:

For any size show, expo, convention, or meeting Lowe Refrigeration, Inc. can offer a complete selection of equipment. Non-contracted shows differ from contracted shows, hence in order for Lowe Refrigeration to offer our range for these types of events, we ask that the client cover 50% of the round trip freight. Equipment in small quantity is usually shipped crated to ensure safe arrival to the show as well as the return to Lowe Refrigeration without damage. This allows our clients to have access to our entire range in any quantity, anywhere in the United States. Equipment orders of a larger quantity will usually be shipped as a full truckload, and a staff member from Lowe Refrigeration will be onsite in order to assist in the unload and reload of the equipment. Therefore, if you have a need for equipment in relation to a non-contracted show, keep us in mind. Forms for these events can be faxed or emailed by request.

### Special Events:

Following the popularity and success of the Modular Cold Rooms that have been utilized by our locations in Europe and Asia, we decided to introduce the very same to the sporting event/hospitality world in the United States. Modular Cold Rooms (Refrigerators or Freezers) are available, 8ft by 8ft size and multiples thereof, for short-term and long-term rentals. Clean, quiet, electric powered units ensure your equipment will be free of loud engine noise and diesel fumes. Perfect for any indoor or outdoor occasion - sporting events, catered events, carnivals, private gatherings, emergency refrigeration needs, and so much more. Our rental division (trade shows/conventions) compliments our support of the event industry by making available copious amounts of refrigerated display equipment found throughout this brochure.

**Call with your request and we will provide the rental package to suit your needs. Lowe Refrigeration, Inc. will work with you to provide what you want, where you want, when you want it!**

## Refrigerated 2 – 20

B Series .....	2	C Series.....	9	K Chillers .....	16
B – LG .....	3	Genova.....	10	K3T Chiller .....	17
B Corner .....	4	Sara.....	11	K Wood Chillers .....	18
Jinny .....	5	Mandy.....	12	H1 .....	19
P360° .....	6	Memphis .....	13	G223 .....	19
Oasis .....	7	Isola .....	14	Starlet .....	19
F2 Chiller .....	8	G4T / G6T Chillers .....	15	Prep .....	20

## Bakery 21 – 25

B1P .....	21	Victoria.....	23	L Harmony.....	25
Kubo 500R .....	22	L Symphony .....	24		

## Wine Display 26

Bodega.....	26
-------------	----

## Frozen 27 – 41

K1T .....	27	E2 .....	30	DC8.....	37
K4TF.....	27	E3 .....	31	SS2P .....	38
VV17.....	28	E4 .....	32	SS2P .....	39
K4T .....	28	D1C .....	33	200GBT .....	40
G1T .....	29	Kubo 500F .....	34	H4IB.....	40
G6FT.....	29	B2F.....	35	Penguin.....	41
E1 .....	30	F2 .....	36	H2 .....	41

## Hot 42 – 48

Isola 4H .....	42	MCTM.....	45	DW .....	47
B1H .....	43	CO25.....	46	200 Hot.....	48
BR13H .....	44	MW .....	46	HSD2 .....	48
MCT.....	45	Top2.....	47		

## Non Refrigerated 49 – 52

I1.....	49	MSU.....	50	SSB3.....	52
I3.....	49	HWS.....	50	SSB1.....	52
MS12.....	49	PTS.....	51		
200 Dry .....	49	PT .....	51		

## Cold Rooms 53 – 57

Ready Built Cold Room .....	53	Modular Cold Room.....	55	Modular Cold Room.....	57
Modular Cold Room .....	54	Modular Cold Room.....	56		

## B Series



### Features

- Automatic defrost
- Heater pan evaporation (no plumbing required)
- Built in preparation counter
- Castors supplied with case
- Easy to clean surfaces
- Forced air cooling
- Fully self contained unit
- Illuminated stainless steel display deck
- Rear access to display deck for server
- Refrigerated under-storage (accessed through rear doors with magnetic gaskets)
- Simple plug in operation
- Top hinged glass with hydraulic arm support for curved glass unit
- ABS foamed end walls
- Ice insert for fish display available upon request

\* Display shelf available upon request (NOT refrigerated)

**B - Back View**

### Specifications

### Model Numbers

	B1	B2	B3
Width (inches)	52 3/8	77	101 5/8
Depth (inches)	43	43	43
Height (inches)	52 1/2	52 1/2	52 1/2
Width without end walls (inches)	47	70 1/4	94
Display area (square feet)	11	16 1/2	22
Storage capacity (cubic feet)	5 1/2	8 1/4	10 3/4
Storage area width (inches)	47	70 1/4	94
Storage area depth (inches)	20	20	20
Storage area height (inches)	10	10	10
Condensing unit size (HP)	1/3	1/3	1/2
Refrigerant	R404	R404	R404
Power supply v/Hz/Ph	120/60/1	120/60/1	120/60/1
Amps	20	20	20
Watts	2000	2000	2000
Deck fans	1	2	3
Temp Range	34/42°F or 1/6°C	34/42°F or 1/6°C	34/42°F or 1/6°C

Plug - each unit requires a single dedicated power supply; 24 hour power if keeping product in unit overnight.

**B - LG**  
*Low Glass Option*  
*Self Service*



**B - LG Back View**

**Features**

- Automatic defrost
- Heater pan evaporation (no plumbing required)
- Built in preparation counter
- Castors supplied with case
- Easy to clean surfaces
- Forced air cooling
- Fully self contained unit
- Illuminated stainless steel display deck
- Rear access to display deck for server
- Refrigerated under-storage (accessed through rear doors with magnetic gaskets)
- Simple plug in operation
- Ice insert for fish display available upon request
- ABS foamed end walls

**Specifications**

**Model Numbers**

	<b>B1LG</b>	<b>B2LG</b>	<b>B3LG</b>
Width (inches)	52 3/8	77	101 5/8
Depth (inches)	43	43	43
Height (inches)	38 1/4	38 1/4	38 1/4
Width without end walls (inches)	47	70 1/4	94
Display area (square feet)	11	16 1/2	22
Storage capacity (cubic feet)	5 1/2	8 1/4	10 3/4
Storage area width (inches)	47	70 1/4	94
Storage area depth (inches)	20	20	20
Storage area height (inches)	10	10	10
Condensing unit size (HP)	1/3	1/3	1/2
Refrigerant	R404	R404	R404
Power supply v/Hz/Ph	120/60/1	120/60/1	120/60/1
Amps	20	20	20
Watts	2000	2000	2000
Deck fans	1	2	3
Temp Range	34/42°F or 1/6°C	34/42°F or 1/6°C	34/42°F or 1/6°C

Plug - each unit requires a single dedicated power supply; 24 hour power if keeping product in unit overnight.



# B Corner

90° Corner



**'B' Corner - Back View**



## Features

- Automatic defrost
- Heater pan evaporation (no plumbing required)
- Built in preparation counter
- Castors supplied with case
- Easy to clean surfaces
- Forced air cooling
- Fully self contained 90° corner
- Ice insert for fish display available upon request
- Illuminated stainless steel display deck
- Rear access to display deck for server
- Simple plug in operation
- Top hinged glass with hydraulic arm support for curved glass unit

## Specifications

## Model Numbers

	B Corner
Width (inches)	52 ½
Depth (inches)	52 ½
Height (inches)	50 ½
Width without end walls (inches)	50
Display area (square feet)	11 ½
Condensing unit size (HP)	½
Refrigerant	R404
Power supply v/Hz/Ph	120/60/1
Amps	20
Watts	2000
Deck fans	2
Temp Range	34/42°F or 1/6°C
Plug - each unit requires a single dedicated power supply; 24 hour power if keeping product in unit overnight.	

# Jinny



Jinny - Back View



## Features

- Bottom hinged glass
- Easy access for loading, setting of display and cleaning
- Simple disassembly for cleaning
- Castors supplied with case
- Euro style front and side glass
- Ice insert for fish display available upon request
- Illuminated stainless steel, display deck
- Rear access to the display for the server
- Under counter refrigerated storage
- Fully self contained unit
- Simple plug in operation
- Granite preparation counter built in
- Easy to clean surfaces and attractive lines
- ABS foamed end walls
- Magnetic door gasket for perfect seal
- Forced air cooling



J-150 Also Available In Black

## Specifications

## Model Numbers

	J104	J150	J250
Width (inches)	41	59	99
Depth (inches)	36 ½	36 ½	36 ½
Height (inches)	50 ½	50 ½	50 ½
Display area (inches)	38 w x 26 ½ d	55 ½ w x 26 ½ d	95 ½ w x 26 ½ d
Display area (square feet)	7	10 ¼	17 ½
Condensing unit size (HP)	1/3	3/8	½
Refrigerant	R404	R404	R404
Power supply v/Hz/Ph	120/60/1	120/60/1	120/60/1
Amps	20	20	20
Watts	2000	2000	2000
Temp Range	34/42°F or 1/6°C	32/42°F or 0/6°C	32/42°F or 0/6°C

Plug - each unit requires a single dedicated power supply; 24 hour power if keeping product in unit overnight.

# P360°

*Grab & Go Island*



## Features

- 360° product visibility
- Forced air system
- Castors supplied with case
- Stainless steel deck
- Protective bumpers
- European appearance
- Digital thermostat
- Suitable for all refrigerated products
- Gray bottom panels
- Simple plug in operation
- Ice insert for fish display available upon request

## Specifications

## Model Number

	P360°
Width (inches)	55 ½
Depth (inches)	47
Height (inches)	35
Display area (square feet)	12 ¼
Condensing unit size (HP)	1/3
Refrigerant	R404
Power supply v/Hz/Ph	120/60/1
Amps	20
Watts	2000
Deck fans	2
Temp Range	36/50°F or 2/6°C

Plug - each unit requires a single dedicated power supply; 24 hour power if keeping product in unit overnight.

# Oasis

Sealed Deck, Suitable for Ice

## Features

- Wooden finish
- Acrylic dome for 360° viewing
- Stainless steel display deck-sealed
- Suitable for ice
- Drain fitted
- Lid is raised electronically
- Self service with lid up
- Display with lid down
- Multipurpose display case
- Smooth finish and appearance
- Fully mobile
- Economical system
- Static evaporation system
- Very rapid pull down time
- Strong construction
- Efficient, quiet system
- Easy to clean surfaces and smooth lines
- Illuminated display
- Fully self contained
- Ozone friendly refrigerant
- Simple plug in operation with simple controls
- Thermostat control
- Operator friendly
- Castors supplied with case
- Spot display



REFRIGERATED

## Specifications

## Model Numbers

	Oasis 1	Oasis 2
Width (inches)	43	55
Depth (inches)	43	55
Height (inches)	52 closed / 68 raised	52 closed / 68 raised
Display area (square feet)	10 ¼	17 ½
Condensing unit size (HP)	1/3	1/3
Refrigerant	R134	R134
Power supply v/Hz/Ph	120/60/1	120/60/1
Amps	20	20
Watts	2000	2000
Deck fans	2	2
Temp Range	34/42°F or 1/6°C	34/42°F or 1/6°C

Plug - each unit requires a single dedicated power supply; 24 hour power if keeping product in unit overnight.

## F2 Chiller



### Features

- Modern, state-of-the-art styling
- Wear resistant black vinyl coated steel exterior with all stainless steel countertop and slide lids for lifetime durability
- Heavy duty, long lasting galvanized steel interior
- Front, rear and side venting louvers allow greater condenser air flow for tight fit installations
- Easily accessible and serviceable slide out condensing unit
- Automatic, energy saving, non-electric condensate disposal system with easily accessible, front mounted cleanout drainage hose and drain pan
- High density, non-CFC polyurethane foamed-in-place insulation

### Specifications

### Model Number

#### F2 Chiller

Width (inches)	64
Depth (inches)	27 ½
Height (inches)	37
Inside Height (inches)	27
Inside Width (inches)	60
Inside Depth (inches)	20
Storage capacity (cubic feet)	18 ¾
Condensing unit size (HP)	1/3
Refrigerant	R134
Power supply v/Hz/Ph	120/60/1
Amps	20
Watts	2000
Temp Range	34/42°F or 1/6°C
Plug - each unit requires a single dedicated power supply; 24 hour power if keeping product in unit overnight.	

## C Series

*Euro Dairy/Deli Merchandiser  
Adjustable Shelves*

### Features

- Open front – self service grab and go
- Easy access for loading and cleaning
- Excellent vision through attractively styled side glass
- White interior
- Four fully adjustable shelves
- Shelves can be angled
- Extra shelves available upon request
- Peg bars and pegs available upon request
- Energy saving self contained night blind
- Efficient, quiet system
- Castors supplied with case
- Fully self contained unit
- Simple plug in operation with simple controls
- No drain required (hot gas evaporation of defrost water)
- Impact resistant finish
- Pricing rails on each shelf
- Shelf product stoppers available upon request



REFRIGERATED

### Specifications

### Model Numbers

	C1	C2	C3
Width (inches)	39 ¾	52 ¼	77
Depth (inches)	34	34	34
Height (inches)	84	84	84
Width without end walls (inches)	36 ¾	49 ½	73 ½
Number of shelves	4	4	4
Shelf width x depth (inches)	36 ¾ w x 17 ½ d	49 ½ w x 17 ½ d	73 ½ w x 17 ½ d
Display area (inches)	36 ¾ w x 24 d	49 ½ w x 24 d	73 ½ w x 24 d
Display area (sq.ft.)	18 ¼	24	36 ¼
Condensing unit size (HP)	¾	¾	1 ⅛
Refrigerant	R404	R404	R404
Power supply v/Hz/Ph (unit)	120/60/1	120/60/1	
Amps (unit)	20	20	20
Watts (unit)	2000	2000	2000
Deck fans	1	2	3
Temp Range	35/42°F or 2/6°C	35/42°F or 2/6°C	35/42°F or 2/6°C

Plug - each unit requires a single dedicated power supply; 24 hour power if keeping product in unit overnight.

# Genova

Open Front Merchandiser

## Features

- Open front – self service grab and go
- Easy access for loading and cleaning
- White Interior
- Five fully adjustable shelves
- Additional shelves available upon request
- Peg bars and pegs available upon request
- Shelves can be angled
- Energy saving self contained night blind
- Efficient, quiet system
- Castors supplied with case
- Fully self contained unit
- Simple plug in operation with simple controls
- No drain required (hot gas evaporation of defrost water)
- Impact resistant finish
- Pricing rails on each shelf
- Glass or solid end walls
- Shelf product stoppers available upon request



## Specifications

## Model Numbers

	Genova 1	Genova 2
Width (inches)	40 ½	52 ¾
Depth (inches)	35 ½	35 ½
Height (inches)	86	86
Width without end walls (inches)	37	49 ¼
Number of shelves	5	5
Shelf width and depth (inches)	36 ½ w x 17 ¾ d	49 w x 17 ¾ d
Display area (inches)	36 ½ w x 21 ¾ d	49 w x 21 ¾ d
Display area (square feet)	27 ½	37
Condensing unit size (HP)	1	1
Refrigerant	R404	R404
Power supply v/Hz/Ph (unit)	120/60/1	120/60/1
Amps	20	20
Watts	2000	2000
Deck fans	1	2
Temp Range	35/42°F or 2/6°C	35/42°F or 2/6°C

Plug - each unit requires a single dedicated power supply; 24 hour power if keeping product in unit overnight.

# Sara

Open Front Merchandiser

## Features

- Open Front – self service grab and go
- Easy access for loading and cleaning
- White interior
- 3 Fully adjustable shelves
- Additional shelves available upon request
- Peg bars and pegs available upon request
- Castors supplied with case
- Energy saving self contained night blind
- Efficient, quiet system
- No drain required (hot gas evaporation of defrost water)
- Pricing rails on each shelf
- Fits through single door
- Forced air cooling
- Shelf product stoppers available upon request



## Specifications

## Model Number

### Sara

Width (inches)	52 ½
Depth (inches)	27
Height (inches)	69
Width without end walls (inches)	49
Display area (square feet)	16.88
Top shelf (inches)	49 w x 7 d
Middle shelf (inches)	49 w x 10 d
Bottom shelf (inches)	49 w x 14 d
Bottom Deck (inches)	49 w x 18 ¾ d
Condensing unit size (HP)	¾
Refrigerant	R404
Power supply v/Hz/Ph	120/60/1
Amps	20
Watts	2000
Deck Fans	2
Temp Range	35/42°F or 2/6°C

Plug - each unit requires a single dedicated power supply; 24 hour power if keeping product in unit overnight.



# Mandy

Open Front Merchandiser  
Black or White



## Features

- Automatic defrost
- Castors supplied with case
- Easy to clean surfaces
- Fits through single door
- Forced air cooling
- Fully self contained unit
- Heater pan evaporation (no plumbing required)
- Illuminated top shelf
- Simple plug in operation
- Stainless steel shelves and display deck
- 3 shelves standard
- Energy saving self contained night blind

## Specifications

## Model Number

### Mandy 100

Width (inches)	39 1/2
Depth (inches)	29 3/4
Height inches)	52
Width without end walls (inches)	36 1/2
Top shelf	34 3/4 w x 8 1/4 d
Middle shelf (inches)	34 3/4 w x 10 d
Bottom shelf (inches)	34 3/4 w x 12 d
Bottom Deck (inches)	35 1/4 w x 22 d
Display area (square feet)	13
Condensing unit size (HP)	3/4
Refrigerant	R404
Power supply v/Hz/Ph	120/60/1
Amps	20
Watts	2000
Deck fans	1
Temp Range	35/42°F or 2/6°C
Plug - each unit requires a single dedicated power supply; 24 hour power if keeping product in unit overnight.	

# Memphis



## Non-Refrigerated

### Features

- Grab and Go refrigerated lower section
- Non refrigerated upper section
- Lockable Castors
- Sliding rear doors on upper section
- Glass shelf in upper section
- Fully mobile
- Smooth end walls
- Available in Black or Bronze
- No drain required (hot gas evaporation of defrost water)
- Efficient, quiet system

## Refrigerated

REFRIGERATED

## Specifications

## Model Numbers

	Memphis 90	Memphis 120
Width (inches)	35 ½	47 ½
Depth (inches)	32 ¾	32 ¾
Height (inches)	56 ½	56 ½
Display deck (inches)	32 w x 22 d	44 w x 22 d
Display deck (square feet)	5	6 ¾
Condensing unit size (HP)	¼	¼
Refrigerant	R404	R404
Power supply v/Hz/Ph	20/60/1	120/60/1
Amps	20	20
Watts	2000	2000
Deck Fans	1	2
Temp Range	37/42°F or 3/6°C	37/42°F or 3/6°C
Plug - each unit requires a single dedicated power supply; 24 hour power if keeping product in unit overnight.		

# Isola

## Features

- Internal basin in AISI stainless steel
- External in wood or stainless steel
- Gastronorm pans available upon request
- Different configurations available
- Pans available upon request
- Accepts deep or shallow pans
- Static refrigeration system
- Digital control panel
- Electronic lid for ease of loading/serving
- Castors supplied with case
- Serving trays optional
- LED lighting optional



## Specifications

## Model Numbers

	Isola 4S/S	Isola 6	Isola 6S/S
Width (inches)	59 ¼	81 ¼	86
Depth (inches)	29 ½	29 ½	29 ½
Height (inches) top down	45	45 ¼	45
Height (inches) top up	59	59	59
Condensing unit size (HP)	1/3	1/3	1/3
Refrigerant	R134	R134	R134
Powers supply v/Hz/Ph	120/60/1	120/60/1	120/60/1
Amps	20	20	20
Watts	2000	2000	2000
Temp range	38/50°F or 3/10°C	38/50°F or 3/10°C	38/50°F or 3/10°C

Plug - each unit requires a single dedicated power supply; 24 hour power if keeping product in unit overnight.

## Features

- For all chilled food products
- Fully self contained bottom mounted condensing unit
- Efficient, quiet system
- Fan assisted
- Automatic evaporator of defrost water
- Ozone friendly
- White interior and black exterior
- Full length internal vertical lights
- Sturdy handle
- Magnetic door gaskets
- Easy access for loading and cleaning
- Easy clean surfaces
- Illuminated canopy for graphics
- Fully adjustable shelves
- Four shelves per door
- Castors supplied with case
- Minimum maintenance
- Low energy consumption
- Double pane glass door(s)
- Self closing door(s)



**G4T**



**G6T**

REFRIGERATED

## Specifications

## Model Numbers

	G4T	G6T
Width (inches)	30	54 ¼
Depth (inches)	28 ¼	28 ¼
Height (inches)	82 ½	82 ½
Canopy dims (inches)	26 ½ w x 5 ½ h	52 w x 5 ½ h
Shelf width x depth (inches)	23 w x 20 ½ d	23 ½ w x 20 d
Number of shelves	4	8
Condensing unit size (HP)	⅓	½
Refrigerant	R134	R134
Power supply v/Hz/Ph (unit)	120/60/1	120/60/1
Amps	20	20
Watts	2000	2000
Temp Range	34/42°F or 1/6°C	34/42°F or 1/6°C

Plug – each unit requires a single dedicated power supply; 24 hour power if keeping product in unit overnight.

# K Chillers

## K2TF

## K2T

### Features

- LED lighting
- Anodized gold or silver finish
- Automatic defrost
- Castors supplied with case
- Easy to clean surfaces
- Forced air cooling
- Fully self contained unit
- Glass on four sides
- Heater pan evaporation (no plumbing required)
- Illuminated display
- Rotating glass shelves (K2T) (mirrored bottom shelf)
- Rotation stops when door is opened
- Simple plug in operation



Rotating Shelves



Wire Shelves

\*K2TF: adjustable wire shelf version of K2T.  
Shelf size (inches) 17 ½ x 17 ½

### Specifications

### Model Numbers

	K2T	K2TF
Width (inches)	23 ½	23 ½
Depth (inches)	24	24
Height (inches)	71	71
Shelf dimensions (inches)	16 ½ diameter	17 ½ x 17 ½
Number of shelves	6	5
Condensing unit size (HP)	1/3	1/3
Refrigerant	R134	R134
Power supply v/Hz/Ph (unit)	120/60/1	120/60/1
Amps	20	20
Watts	2000	2000
Evaporator fans	1	1
Temp range	35/50°F or 4/10°C	35/50°F or 4/10°C

Plug – each unit requires a single dedicated power supply; 24 hour power if keeping product in unit overnight.

# K3T

## Features

- LED lighting
- Anodized gold or silver finish
- Automatic defrost
- Castors supplied with case
- Easy to clean surfaces
- Forced air cooling
- Fully self contained unit
- Glass on six sides (K3T)
- Heater pan evaporation (no plumbing required)
- Illuminated display
- Rotating glass shelves (mirrored bottom shelf)
- Rotation stops when door is opened
- Simple plug in operation



REFRIGERATED

## Specifications

## Model Number

	K3T
Width (inches)	31 ¾
Depth (inches)	36
Height (inches)	69
Shelf diameter (inches)	22
Number of shelves	5
Condensing unit size (HP)	7/8
Refrigerant	R134
Power supply v/Hz/Ph (unit)	120/60/1
Amps	20
Watts	2000
Evaporator fans	1
Temp range	35/50°F or 4/10°C

Plug – each unit requires a single dedicated power supply; 24 hour power if keeping product in unit overnight.

## K2TWR

### Features

- Humidity controlled (K2TWCF, K2TWCR)
- Rotating or square glass shelves available
- Beautiful wood finish
- Castors supplied with case
- Economical system
- Glass on all four sides
- All around view of product
- Mirrored bottom shelf
- Adjustable shelves
- Strong construction
- Efficient, quiet system
- Easy to clean surfaces and lines
- Forced air system
- Illuminated display
- Fully self contained unit
- Ozone friendly refrigerant
- Simple plug in operation with simple controls
- Thermostat control
- Operator friendly
- Single door access
- Rotation stops when door is opened



Rotating Shelves

## K2TWF



Square Shelves

### Specifications

### Model Numbers

	K2TWF	K2TWR	K2TWCF	KWTWCR
Application	General	General	Chocolate	Chocolate
Humidity control	No	No	Yes	Yes
Width (inches)	32 ½	32 ½	32 ½	32 ½
Depth (inches)	33 ½	33 ½	33 ½	33 ½
Height (inches)	72	72	72	72
Shelves (square or rotating)	square	Rotating	square	Rotating
Shelf width x depth (inches)	20 ½ w x 22 ½ d	-----	20 ½ w x 22 ½ d	-----
Shelf diameter (inches)	-----	22	-----	22
Number of shelves	5	6	5	6
Condensing unit size (HP)	1/3	1/3	1/3	1/3
Refrigerant	R134	R134	R134	R134
Power supply v/Hz/Ph (unit)	120/60/1	120/60/1	120/60/1	120/60/1
Amps	20	20	20	20
Watts	2000	2000	2000	2000
Evaporator fans	1	1	1	1
Temp Range	35/50°F or 4/10°C	35/50°F or 4/10°C	56/62°F or 14/16°C	56/62°F or 14/16°C

Plug – each unit requires a single dedicated power supply; 24 hour power if keeping product in unit overnight.

## H1

### Features

- Storage Chiller
- Weighs 73 lbs



## G223

### Features

- 23 Liter Total Capacity
- 11.5 Liters Per Bowl
- 6.34 Gallon Total Capacity
- 3.17 Gallons Per Bowl
- Motorized paddles maintain mixing of product



## Starlet

### Features

- Counter top chiller
- Electronic thermostat
- Weighs 85 lbs



## Specifications

## Model Numbers

	H1	G223	Starlet
Width (inches)	20 ¾	13 ½	24
Depth (inches)	20 ½	17	23
Height (inches)	32 ¼	25	23
Shelf dimensions (inches)	17 w x 13 d	-----	20 ¾ w x 6 ¾ d
Deck dimensions (inches)	17 ½ w x 9 d	-----	20 ¾ w x 6 ½ d
Condensing unit size (HP)	1/6	1/10	1/8
Refrigerant	R134	R134	R134
Power Supply v/Hz/Ph (unit)	120/60/1	120/60/1	120/60/1
Amps	5	15	10
Watts	500	1500	1000
Deck Fans	-----	-----	yes
Temp Range	35/42°F or 2/6°C	39/61°F or 4/16°C	35/42°F or 2/6°C

Plug - each unit requires a single dedicated power supply; 24 hour power if keeping product in unit overnight.



# Prep



## Features

- Refrigerated Prep Counter
- Stainless steel finish
- Low energy consumption
- Two storage levels
- Adjustable shelves
- Six poly-carbonate inserts included
- Corrosion resistant white interior finish
- Automatic defrost cycle
- Extra deep removable cutting board
- Lockable castors
- Fully mobile

## Specifications

## Model Number

	Prep 1	Prep 2
Width (inches)	44 ½	67 ½
Depth (inches)	32 ½	35 ½
Height (inches)	41 ½	41 ½
Storage area (inches)	25 ¼ w x 27 d x 24h	48 w x 27 d x 24 h
Shelf (inches)	24 w x 26 d	23 w x 26 d (x2)
Cutting board dimensions (inches)	44 w x 16 ½ d	67 ½ w x 19 ½ d
Condensing unit size (HP)	1/6	1/2
Refrigerant	R134	R134
Power supply v/Hz/Ph	120/60/1	120/60/1
Amps	20	20
Watts	2000	2000
Fan assisted	yes	yes
Temperature Range	33.8°/41°F	33.8°/41°F

Plug - each unit requires a single dedicated power supply; 24 hour power if keeping product in unit overnight.

# B1P

## Features

- Top shelf is non-refrigerated
- Top hinged glass, hydraulic arm support
- Easy access for loading, setting of display and cleaning
- Euro style front and side glass
- Illuminated stainless steel, display deck and glass shelves
- Rear access to the display for the server
- Main display deck is accessed via a stainless steel pull out drawer from the rear of the case. Magnetic gaskets ensure a perfect seal
- Three level display
- Preparation counter built in
- Automatic defrost
- No plumbing required, auto evaporation of defrost water
- Easy to clean surfaces and attractive lines
- Castors supplied with case
- Fully self contained unit
- Simple plug in operation
- ABS foamed end walls
- Forced air system



**Back View**

## Specifications

## Model Numbers

### B1P

Width (inches)	50 ½
Depth (inches)	43
Height (inches)	51 ½
Top Shelf size (inches)	46 w x 7 ½ d
Bottom Shelf size (inches)	46 w x 10 d
Drawer dimensions (inches)	37 w x 32 ¾ d
Bottom display area total (inches)	47 w x 32 ¾ d
Condensing unit size (HP)	½
Refrigerant	R404
Power supply v/Hz/Ph	120/60/1
Amps	20
Watts	2000
Temp Range	34/42°F or 1/6°C

Plug - each unit requires a single dedicated power supply; 24 hour power if keeping product in unit overnight.

# Kubo 500R

Display Refrigerator

## Features

- Adjustable wire shelves
- Hinged doors
- Vertical lights
- Castors supplied with case
- 360° visibility
- Easy to clean
- Automatic defrost
- No drain required
- Stainless steel front



## Specifications

## Model Number

500R

Width (inches)	60
Depth (inches)	28
Height (inches)	54
Number of shelves	8
Shelf dimensions (inches)	23 ½ w x 15 ¾ d
Condensing unit size (HP)	1 ⅛
Refrigerant	R404
Power supply v/Hz/Ph	120/60/1
Amps	20
Watts	2000
Deck fans	Yes
Temp range	36°/ 50° F or 2°/10° C

Plug - each unit requires a single dedicated power supply; 24 hour power if keeping product in unit overnight.

## Victoria

### Features

- Three exhibition levels
- Rear sliding glass doors
- Available in black or stainless steel finish
- Front access to condensing unit
- Double tempered curved glass
- Castors supplied with case
- Low energy consumption
- Easy to clean
- Automatic defrost cycle
- No drain required
- Stainless steel deck
- Stainless steel front
- Stainless steel shelves
- Static air system
- Wide stainless steel top



### Specifications

### Model Numbers

	V-150	V-200
Width (inches)	56 <sup>2</sup> / <sub>3</sub>	74
Depth (inches)	36	36
Height (inches)	50	50
Number of shelves	4	4
Top shelf dimensions (inches)	24 <sup>1</sup> / <sub>4</sub> w x 15 d	32 <sup>7</sup> / <sub>8</sub> w x 15 d
Other shelf dimensions (inches)	24 <sup>1</sup> / <sub>4</sub> w x 17 d	32 <sup>7</sup> / <sub>8</sub> w x 17 d
Condensing unit size (HP)	<sup>1</sup> / <sub>4</sub>	<sup>1</sup> / <sub>3</sub>
Refrigerant	R134A	R134A
Power Supply v/Hz/Ph	120/60/1	120/60/1
Amps	20	20
Watts	2000	2000
Temp Range	33/50°F or 2/10°C	33/50°F or 2/10°C

Plug - each unit requires a single dedicated power supply; 24 hour power if keeping product in unit overnight.

# L Symphony

## Features

- Anodized finish
- Top hinged, curved front glass
- Glass ends
- Fixed glass shelves (3)
- Dual temperature zones
- Top two shelves are non refrigerated
- Stainless steel display deck
- Granite preparation counter built in
- Pull out drawers (stainless steel)
- Magnetic gasket on drawers
- European finish and appearance
- Castors supplied with case
- Economical system
- Static evaporator system
- Strong construction
- Efficient, quiet system
- Easy to clean surfaces and lines
- Illuminated display
- Fully self contained unit
- Ozone friendly refrigerant
- Simple plug in operation with simple controls
- Thermostat control
- Operator friendly
- Sliding door access at rear of case for server



Additional Colors Available

## Specifications

## Model Numbers

	L1	L3	L5
Width (inches)	55 ¼	87	114 ¼
Depth (inches)	40	40	40
Height (inches)	50	50	50
Number of shelves	3	3	3
Top shelf dimensions (inches)	51 w x 8 ⅔ d	82 ½ w x 8 ⅔ d	110 w x 8 ⅔ d
Middle shelf dimensions (inches)	51 w x 8 ⅔ d	82 ½ w x 8 ⅔ d	110 w x 8 ⅔ d
Lower shelf dimensions (inches)	51 w x 11 d	82 ½ w x 11 d	110 w x 11 d
Number of Drawers	2	3	4
Drawer dimensions (inches)	20 ¾ w x 33 ¾ d	20 ¾ w x 33 ¾ d	20 ¾ w x 33 ¾ d
Condensing unit size (HP)	¼	½	1
Refrigerant	R404	R404	R404
Power supply v/Hz/Ph	120/60/1	120/60/1	120/60/1
Amps	20	20	20
Watts	2000	2000	2000
Static Refrigeration	Yes	Yes	Yes
Temp Range	36/50°F or 2/10°C	36/50°F or 2/10°C	36/50°F or 2/10°C

Plug - each unit requires a single dedicated power supply; 24 hour power if keeping product in unit overnight.

# L Harmony

## Features

- Anodized finish
- Curved front glass
- Glass ends
- Fixed glass shelves (3)
- Glass all around display
- Stainless steel lower display deck
- Sliding glass doors at rear, full size for access
- European appearance
- Castors supplied with case
- Economical system
- Forced air system- uniform cooling on all levels
- Strong construction
- Efficient, quiet system
- Easy to clean surfaces and lines
- Illuminated display (light above each shelf)
- Fully self contained
- Ozone friendly refrigerant
- Simple plug in operation with simple controls
- Thermostat control
- Operator friendly
- No plumbing required



Additional Colors Available

## Specifications

## Model Numbers

	L1H	L3H	L5H
Width (inches)	37	52 ½	83
Depth (inches)	31 ¼	31 ¼	31 ¼
Height (inches)	54 ½	54 ½	54 ½
Number of shelves	3	3	3
Top shelf dimensions (inches)	35 ½ w x 13 d	51 w x 13 d	81 ½ w x 13 d
Middle shelf dimensions (inches)	35 ½ w x 13 ½ d	51 w x 13 ½ d	81 ½ w x 13 ½ d
Lower shelf dimensions (inches)	35 ½ w x 16 d	51 w x 16 d	81 ½ w x 16 d
Condensing unit size (HP)	¼	½	1
Refrigerant	R404	R404	R404
Power Supply v/Hz/Ph	120/60/1	120/60/1	120/60/1
Amps	20	20	20
Watts	2000	2000	2000
Fan assisted	Yes	Yes	Yes
Temp Range	34/42°F or 1/6°C	34/42°F or 1/6°C	34/42°F or 1/6°C

Plug - each unit requires a single dedicated power supply; 24 hour power if keeping product in unit overnight.

# Bodega

WINE DISPLAY

## Features

- Glass doors
- Interior full length lighting
- Sturdy handle
- Easy to clean interior
- Suitable for refrigerated products
- Efficient, quiet system
- Fully self contained
- Ozone friendly
- Castors supplied with case
- Single temperature or four temperature zones



**Bod1**



**Bod2**


## Specifications

## Model Numbers

	Bod1	Bod2
Width (inches)	22 ¾	43
Depth (inches)	25 ½	25 ½
Height (inches)	77 ½	77 ½
Capacity: bottle size – 90	15x4= 60	32x4=128
bottle size – 77	24x4=96	50x4=200
bottle size – 75	24x4=96	52x4=208
Condensing unit size (HP)	1/3	1/2
Refrigerant	R134	R134
Power supply v/Hz/Ph (unit)	120/60/1	120/60/1
Amps	20	20
Watts	2000	2000
Fan assisted	yes	yes
Temp Range	41/60°F or 5/15°C	41/60°F or 5/15°C

Plug – each unit requires a single dedicated power supply; 24 hour power if keeping product in unit overnight.

**K1T**  
4-Sided  
Fixed Shelf Freezer

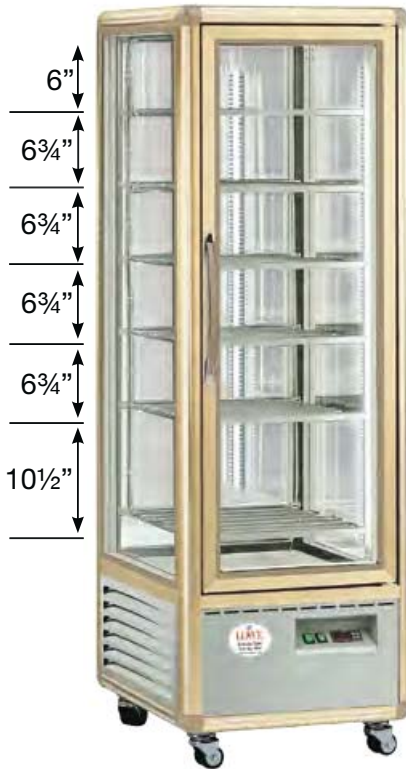

**K4TF**  
4-Sided  
Fixed Shelf Freezer



**Features**

- Anodized Finish
- Glass on all sides
- All around view of product
- Castors supplied with case
- Economical system
- Fixed evaporator shelves
- Efficient, quiet system
- Digital Thermostat control
- No plumbing required

Also Available In Silver

FROZEN

**Specifications**

**Model Numbers**

	K1T	K4TF
Width (inches)	23 1/2	28
Depth (inches)	25 1/2	29 1/2
Height (inches)	71 1/4	70
Number of shelves	6	5
Shelf type	Fixed	Fixed
Condensing unit size (HP)	2/3	3/4
Refrigerant	R404	R404
Power Supply v/Hz/Ph	120/60/1	120/60/1
Amps	20	20
Watts	2000	2000
Fixed shelf evaporator	yes	yes
Temp Range	0/-18°C or 32/0°F	0/-18°C or 32/0°F

Plug - each unit requires a single dedicated power supply; 24 hour power if keeping product in unit overnight.



# VV17



### Features

- Fully adjustable shelves
- 3 shelves standard
- Digital thermostat control
- Vertical lighting
- No plumbing required
- Efficient, quiet system
- Forced air system

## K4T

4-Sided  
Revolving Shelf Freezer



### Features

- LED lighting
- Anodized finish
- Glass on all sides
- All around view of product
- Castors supplied with case
- Economical system
- Rotating shelves
- Mirrored bottom shelf
- Adjustable shelves
- Efficient, quiet system
- Forced air system
- Digital thermostat control
- No plumbing required
- Gold finish available

FROZEN

### Specifications

### Model Numbers

	VV17	K4T
Width (inches)	36	28
Depth (inches)	26	29 ½
Height (inches)	60 ½	71 ½
Number of shelves	3	6
Shelf type	Adjustable	Revolving
Shelf Dimensions	30 ½ w x 15 ¾ d	18" Diameter
Condensing unit size (HP)	½	¾
Refrigerant	R404	R404
Power Supply v/Hz/Ph	120/60/1	120/60/1
Amps	20	20
Watts	2000	2000
Fan assisted	yes	yes
Temp Range	0/-18°C or 32/0°F	0/-20°C or 32/-4°F

Plug - each unit requires a single dedicated power supply; 24 hour power if keeping product in unit overnight.



**G1T**

**Features**

- LED lighting
- Fully adjustable shelves
- Frost free
- Triple pane glass doors
- Self closing doors
- Stainless steel bottom
- No plumbing required, evaporator condensing pan included
- Automatic defrost cycle
- Forced air system
- Illuminated display
- Castors supplied with case



**G6FT**

**Improved Visibility  
and Lighting**

FROZEN

**Specifications**

**Model Number**

	<b>G1T</b>	<b>G6FT</b>
Width (inches)	30	54
Depth (inches)	29 ½	29 ½
Height (inches)	83 ¾	83 ¾
Number of shelves	4	4
Shelf dimensions	23 w x 20 ½ d	23 ½ w x 20 d
Number of doors	1	2
Canopy dims (inches)	26 ½ w x 5 ½ h	52 w x 5 ½ h
Condensing unit size (HP)	½	1
Refrigerant	R404	R404
Power supply v/Hz/Ph (unit)	120/60/1	120/60/1
Amps	20	20
Watts	2000	2000
Fan assisted	Yes	Yes
Temp Range	0/-20°C or 28/-4°F	0/-20°C or 28/-4°F

Plug – each unit requires a single dedicated power supply; 24 hour power if keeping product in unit overnight.

# E1 / E2

Display Freezer

## Features

- Curved glass front cabinets allow for more product visibility
- 2 sliding glass lids
- Easy access for loading, setting of display and cleaning
- Suitable for all frozen products
- Efficient, quiet system
- Easy to clean surfaces and attractive lines
- Fully self contained unit
- Ozone friendly refrigerant
- Simple plug in operation with simple controls
- Castors supplied with case



## Specifications

## Model Number

	E1	E2
Width (inches)	60	88
Depth (inches)	35 ½	35 ½
Height (inches)	40	40
Condensing unit size (HP)	½	½
Refrigerant	R404	R404
Power Supply v/Hz/Ph	120/60/1	120/60/1
Amps	20	20
Watts	2000	2000
Static Refrigeration	Yes	Yes
Temp Range	0/-22°C or 32/-8°F	0/-22°C or 32/-8°F

Plug - each unit requires a single dedicated power supply; 24 hour power if keeping product in unit overnight.

## E3

### Display Freezer

#### Features

- Curved glass front cabinets allow for more product visibility
- 2 sliding glass lids
- Easy access for loading, setting of display and cleaning
- Suitable for all frozen products
- Efficient, quiet system
- Easy to clean surfaces and attractive lines
- Fully self contained unit
- Ozone friendly refrigerant
- Simple plug in operation with simple controls
- Castors supplied with case



#### Specifications

#### Model Number

E3

Width (inches)	77
Depth (inches)	34
Height (inches)	37
Condensing unit size (HP)	1/2
Refrigerant	R404
Power Supply v/Hz/Ph	120/60/1
Amps	20
Watts	2000
Static Refrigeration	Yes
Temp Range	0/-22°C or 32/-8°F

Plug - each unit requires a single dedicated power supply; 24 hour power if keeping product in unit overnight.

# E4

Display Freezer

## Features

- Glass front cabinets allow for more product visibility
- 2 sliding glass lids
- Easy access for loading, setting of display and cleaning
- Suitable for all frozen products
- Efficient, quiet system
- Easy to clean surfaces and attractive lines
- Fully self contained unit
- Ozone friendly refrigerant
- Simple plug in operation with simple controls
- Castors supplied with case



## Specifications

## Model Number

	E4
Width (inches)	77
Depth (inches)	34
Height (inches)	39
Condensing unit size (HP)	1/2
Refrigerant	R404
Power supply v/Hz/Ph	120/60/1
Amps	20
Watts	2000
Static refrigeration	Yes
Temp range	0/-22°C or 32/-8°F
Plug - each unit requires a single dedicated power supply; 24 hour power if keeping product in unit overnight.	

# D1C

Display Freezer

## Features

- 5 baskets standard
- 2 sliding glass lids
- LED lighting
- Easy access for loading, setting of display and cleaning
- Suitable for all frozen products
- Efficient, quiet system
- Easy to clean surfaces and attractive lines
- Fully self contained unit
- Simple plug in operation with simple controls
- Castors supplied with case



FROZEN

## Specifications

## Model Number

	D1C
Width (inches)	58
Depth (inches)	30
Height (inches)	34
Condensing unit size (HP)	1/2
Refrigerant	R134A
Power supply v/Hz/Ph	120/60/1
Amps	20
Watts	2000
Static refrigeration	Yes
Temp range	0/-20°C or 50/-4°F

Plug - each unit requires a single dedicated power supply; 24 hour power if keeping product in unit overnight.

# Kubo 500F

Display Freezer

## Features

- Adjustable wire shelves
- Hinged doors
- Vertical lights
- Castors supplied with case
- 360° visibility
- Easy to clean
- Automatic defrost
- No drain required
- Stainless steel front



FROZEN

## Specifications

## Model Number

500F

Width (inches)	60
Depth (inches)	28
Height (inches)	54
Number of shelves	8
Shelf dimensions (inches)	23 ½ w x 15 ¾ d
Condensing unit size (HP)	1 ⅛
Refrigerant	R404
Power supply v/Hz/Ph	120/60/1
Amps	20
Watts	2000
Deck fans	Yes
Temp range	0/-18°C or 32/0°F

Plug - each unit requires a single dedicated power supply; 24 hour power if keeping product in unit overnight.

**B2F**  
Display Freezer



Limited Quantity Available

**Features**

- Top hinged glass, hydraulic arm support
- Easy access for loading, setting of display and cleaning
- Euro style front and side glass
- Stainless steel interior
- Rear access to the display for the server
- Preparation counter built in
- Easy to clean surfaces and attractive lines
- Castors supplied with case
- Fully self contained unit
- Simple plug in operation with simple controls
- Impact resistant finish
- ABS foamed end walls

**\*Note: No Refrigerated Understorage.**

**Specifications**

**Model Number**

	B2F
Width (inches)	73 ½
Depth (inches)	43
Height (inches)	51 ½
Condensing unit size (HP)	1
Refrigerant	R404
Power supply v/Hz/Ph	120/60/1
Amp	20
Watts	2000
Deck fans	Yes
Temp range	0/-18°C or 32/0°F

Plug - each unit requires a single dedicated power supply; 24 hour power if keeping product in unit overnight.



## F2



### Features

- 2 sliding glass lids
- Easy access for loading, setting of display and cleaning
- Excellent vision through top glass
- White interior and exterior
- Suitable for all frozen products
- Efficient, quiet system
- Easy to clean surfaces and attractive lines
- Fully self contained unit
- Ozone friendly refrigerant
- Simple plug in operation with simple controls
- Manual defrost and drain
- One standard basket included
- Impact resistant finish
- Castors supplied with case

### Specifications

### Model Number

	F2
Width (inches)	47 ¼
Depth (inches)	24 ¾
Height (inches)	34 ¼
Inside width (inches)	42
Inside depth (inches)	20
Inside height (inches)	25
Storage capacity (cubic feet)	12 ¼
Condensing unit size (HP)	¾
Refrigerant	R404
Power supply v/Hz/Ph	120/60/1
Amps	20
Watts	2000
Deck fans	n/a
Temp range	0/-20°C or 32/-4°F

Plug - each unit requires a single dedicated power supply; 24 hour power if keeping product in unit overnight.

## DC8 Dipping Cabinet

### Features

- Modern design with high visibility
- Stainless steel preparation counter
- Stainless steel deck
- Silver painted end walls
- Sliding plexi rear doors
- Illuminated logo panel
- Internal lighting for product
- Pricing rails
- Castors supplied with case
- No drain required
- Automatic defrost
- 8 and 12 flavor cabinet available
- Holds 2 ½ gallon size tubs (10 inch deep x 10 diameter)



FROZEN

### Specifications

### Model Numbers

	DC8	DC12
Width (inches)	50 ¼	72
Depth (inches)	43 ½	43 ½
Height (inches)	56	56
Condensing unit size (HP)	¾ x 2	¾ x 2
Refrigerant	R404	R404
Power supply v/Hz/Ph	120/60/1	120/60/1
Amps	30	30
Watts	3000	3000
Deck fans	Yes	Yes
Temp range	3/-4°F or -16/-20°C	3/-4°F or -16/-20°C

Plug - each unit requires a single dedicated power supply; 24 hour power if keeping product in unit overnight.

# G12

*Gelato-Italian Ice Cream*



## Features

- Modern design – high visibility
- Painted gray ABS end walls
- Stainless steel preparation counter
- Fully mobile
- Castors supplied with case
- Stainless steel bins
- Stainless steel front
- Sliding rear doors
- Full length illumination of product
- Pricing rails
- Illumination panel for product transparencies

## Specifications

## Model Number

	G12
Width (inches)	50 ¼
Depth (inches)	44 ¾
Height (inches)	54 ¾
Condensing unit size (HP)	¾
Refrigerant	R404
Power supply v/Hz/Ph	220v single phase
Amps	30
Watts	3000
Deck fans	Yes
Temp range	0/-18°C or 03/0°F

Plug - each unit requires a single dedicated power supply; 24 hour power if keeping product in unit overnight.

## SS2P

Two Flavor Soft Serve Ice Cream Machine

### Features

- Small foot print, saves valuable floor space
- Easy cleaning and operation
- No installation required, plug it in and it is ready to go
- Castors supplied with case
- Soft serve mix not included
- Sanitized prior to each rental
- Serves two flavors plus a swirl option.
- Overnight switch to keep product refrigerated when not in use
- Automatic shut off when product is low



FROZEN

### Specifications

### Model Number

SS2P

Width (inches)	21
Depth (inches)	27 ½
Height (inches)	52
Condensing unit size (HP)	1 ⅛, 1/8
Refrigerant	R404
Power supply v/Hz/Ph	220V single phase
Amps	30
Watts	3000

Plug - each unit requires a single dedicated power supply; 24 hour power if keeping product in unit overnight.

## 200 GBT

Fixed Shelves



### Features

- Gold or silver anodized finish
- Glass walls
- Smooth finish. Rounded corners
- Static evaporator system
- Rapid pull down time
- Strong construction
- Efficient, quiet system
- Easy to clean surface and lines
- Illuminated display
- Fully self contained unit
- Ozone friendly refrigerant
- Simple plug in operation with simple controls
- Operator friendly
- Thermostat control
- Fixed shelves are 7 ¼ inches apart

## H4IB

Storage Freezer



### Features

- Adjustable shelves
- Glass display
- Counter top unit
- Efficient, quiet system

### Specifications

### Model Numbers

	200 GBT	H4IB
Width (inches)	47 ½	23 ½
Depth (inches)	19 ½	20 ¼
Height (inches)	28	26 ½
Condensing unit size (HP)	1/3	1/4
Refrigerant	R404	R134
Power supply v/Hz/Ph	120/60/1	120/60/1
Amps	20	20
Watts	2000	2000
Fan assisted	no	yes
Temp range	0/-18°C or 32/0°F	0/-18°C or 32/0°F
Fixed shelf evaporator	yes	no

Plug - each unit requires a single dedicated power supply; 24 hour power if keeping product in unit overnight.



**Penguin 1**  
Single Bowl  
Frozen Drink Display

**Penguin 2**  
Double Bowl  
Frozen Drink Display



**Features**

- One or two bowl frozen drink display
- Full access to all the components for quick and easy maintenance
- Simple bowl removal for easy cleaning
- One compressor for each bowl
- Manual control of the thickness of the drink
- Quick product preparation
- Internal illumination system

**H2**



**Features**

- Efficient, quiet system
- Perfect for under counter use

FROZEN

**Specifications**

**Model Numbers**

	H2	Penguin 1	Penguin 2
Width (inches)	19 ½	7 ¾	15 ½
Depth (inches)	21 ½	17	17
Height (inches)	32 ¾	34 ¼	34 ¼
Bowl capacity in liters	n/a	12	12
Bowl capacity in gallons	n/a	3.17	3.17
Condensing unit size (HP)	¼	¼	½
Refrigerant	R134	R134	R134
Power supply v/Hz/Ph	120/60/1	120/60/1	120/60/1
Amps	20	20	20
Watts	2000	2000	2000
Temp range	0/-18°C or 32/0°F	frozen drinks	frozen drinks

Plug - each unit requires a single dedicated power supply; 24 hour power if keeping product in unit overnight.

# Isola 4H

## Features

- Electrically raised canopy
- Castors supplied with case
- Divider bars included
- Stainless steel option available
- Adjustable water temperature control
- Fitted drain
- Heat lamps for additional heating
- 'Low water level' alarm
- Serving trays optional
- Digital control panel
- Pans available upon request
- Internal basin in AISI stainless steel
- Accepts deep or shallow pans
- Different configurations available
- Gastronorm pans available upon request



**Isola 4H**  
*Lid Electronically Lowered.*

## Specifications

## Model Numbers

	Isola 4H	Isola 4HS/S
Width (inches)	56	59 ¼
Depth (inches)	29½	29 ½
Height (inches) top down	45 ¼	45
Height (inches) top up	59	59
Power supply v/Hz/Ph	120/60/1	120/60/1
Amps	30	30
Watts	3000	3000
Temp range	100/194°F or 38/90°C	100/194°F or 38/90°C

Plug - each unit requires a single dedicated power supply.

## B1H

### Features

- Top hinged glass, hydraulic arm support
- Easy access for loading, setting of display and cleaning
- Euro style front and side glass
- Illuminated stainless steel, perforated display deck
- Rear access to the display for the server
- Preparation counter built in
- Automatic 'low water level' power cut-off
- Easy to clean surfaces and attractive lines
- Castors supplied with case
- Fully self contained unit
- Rheostat control for heat/light
- Simple plug in operation with simple controls
- Adjustable water temperature control
- Water inlet (½ inch) and drain fitting (1 ½ inch)
- Impact resistant finish
- Stainless steel deck
- ABS foamed end walls
- Divider bars for Gastronorm pans available
- Heating area can be configured several ways using divider bars.
- Heating area dimensions: 42 x 25 ½ (inches)
- Gastronorm pans available upon request



### Specifications

### Model Number

#### B1H

Width (inches)	51
Depth (inches)	43
Height (inches)	51 ½
Power Supply v/Hz/Ph	220/60/1
Amps	30
Watts	3000
Water Temperature Range	167/176°F or 75/80°C
Deck Temperature	146°F or 63°C
Plug - each unit requires a single dedicated power supply.	



# BR13H

## Features

- 4 Adjustable heated shelves
- Sliding glass rear doors
- Vertical lights
- Castors supplied with case
- No drain required
- Modern design
- 360° visibility
- Stainless steel front
- Stainless steel front
- Easy to clean



HOT

## Specifications

## Model Number

	BR13H
Width (inches)	53
Depth (inches)	29 ½
Height (inches)	54 ¼
Top shelf dimensions (inches)	50 w x 11 d
Other shelf dimensions (inches)	50 w x 11 d
Power Supply v/Hz/Ph	120/60/1
Amps	30
Watts	3000
Temperature Range	140/176°F or 60/80°C

Plug - each unit requires a single dedicated power supply.

**MCT**  
4 Burner



**Features**

- Stainless steel table with electric 4 burner ceramic cook top
- Locking castors included
- Under cabinet storage shelf
- Optional attached mirror for high visibility



**MCT**  
Back View - Under Storage



**MCTM**  
With Mirror

**Specifications**

**Model Numbers**

Width (inches)  
Depth (inches)  
Height (inches)  
Power Supply v/Hz/Ph  
Amps  
Watts

	MCT	MCTM
Width (inches)	60	60
Depth (inches)	30 ¼	30 ¼
Height (inches)	36	97
Power Supply v/Hz/Ph	220/60/1	220/60/1
Amps	30	30
Watts	3000	3000

Plug - each unit requires a single dedicated power supply.

# CO25

## Convection Oven

### Features

- Convection oven with two adjustable shelves
- Holds ½ size tray: 18 x 14 ½ (inches) - not included
- Trays for oven available upon request
- Oven is attached to rolling stand
- Oven available without stand
- Rolling stand has six shelves for sheet pans
- Sheet pans for stand available upon request
- Manual 60 minute timer



### Specifications

### Model Number

#### CO25

Width (inches)	28 ½
Depth (inches)	28
Height (inches)	53 ¾
Inside width (inches)	18 ½
Inside depth (inches)	14 ½
Inside height (inches)	10 5/8
Power Supply v/Hz/Ph	120/60/1
Amps	20
Watts	2000
Temperature Range	120/480°F or 49/249°C

Plug - each unit requires a single dedicated power supply.

# MW

## Microwave



### Specifications

### Model Number

#### MW

Width (inches)	24
Depth (inches)	18
Height (inches)	14
Power Supply v/Hz/Ph	120/60/1
Amps	10
Watts	1000

Plug - each unit requires a single dedicated power supply.

## Top2

Dual burner cook top



### Features

- 2 electric burners
- Compact and lightweight



## DW

Dual lamp display warmer

### Features

- Holds a 12 x 20 (inches) Pan
- Pan not included

### Specifications

### Model Numbers

	Top2	DW
Width (inches)	22 ½	13
Depth (inches)	14	19
Height (inches)	3	24 ¼
Power Supply v/Hz/Ph	120/60/1	120/60/1
Amps	20	20
Watts	2000	2000

Plug - each unit requires a single dedicated power supply.

## 200 Hot

(Self Serve) Counter Top



### Features

- Warming lamps above each shelf
- Sturdy construction designed for easy access of product
- Self serve open access

### Specifications

### Model Number

#### 200 Hot

Width (inches)	35 ½
Depth (inches)	21
Height (inches)	28
Power Supply v/Hz/Ph	120/60/1
Amps	15
Watts	1500
Temperature Range	95/160°F or 35/71°C

Plug - each unit requires a single dedicated power supply.

HOT

## HSD2



### Features

- Hard coated aluminum heat shelf
- Tempered glass sides for maximum visibility
- Heavy duty stainless steel construction for base, sides and top
- Thermostat controlled heat for base and rear overhead heat source.

### Specifications

### Model Number

#### HSD2

Width (inches)	36
Depth (inches)	28
Height (inches)	29 ¾
Power Supply v/Hz/Ph	120/60/1
Amps	20
Watts	2000

Plug - each unit requires a single dedicated power supply.



**I1 / I3**  
Display Ice Tray

**MS12**  
Electric Meat Slicer  
12" Cutting Wheel



**200 Dry**  
Self-Serve Counter Top Display

- Gold or silver anodized finish
- Easy to clean surfaces and lines
- Glass walls
- Multi purpose
- Illuminated display
- Smooth finish
- Rounded corners
- Strong construction
- Simple plug In operation with simple controls

NON REFRIGERATED

**Specifications**

**Model Numbers**

	<b>I1</b>	<b>I3</b>	<b>MS12</b>	<b>200 Dry</b>
Width (inches)	40	64	23	35 ¼
Depth (inches)	22	22	18	21
Height (inches)	7	7	16	28
Power Supply v/Hz/Ph	n/a	n/a	120/60/1	120/60/1
Amps	n/a	n/a	15	5
Watts	n/a	n/a	1500	500

Plug - each unit requires a single dedicated power supply.

## MSU

*Mobile Sink Unit  
For Hands and Utensils Only*



### Features

- Hand sink cart with 2-compartment sink
- Two 5 gallon water tanks
- Two 7 gallon waste water tanks
- 2½ gallon hot water heater
- Soap dispenser and paper towel holder included
- Durable polyethylene construction
- Castors supplied with case

### Specifications

### Model Number

#### MSU

Width (inches)	41
Depth (inches)	32 ½
Height (inches)	45 ½
Power Supply v/Hz/Ph	120/60/1
Amps	15
Watts	1500
Fresh water capacity	2 x 5 gallon or 18.92 liters
Waste tank capacity	2 x 7 gallon or 26.49 liters
Plug - each unit requires a single dedicated power supply.	

## HWS

*Two Person Accessible Hand Washing Station*

### Features

- 1,408 single uses (22-gallon fresh water capacity; 24-gallon gray water capacity)
- Two 30-ounce soap dispensers and four 250-sheet built-in paper towel dispensers
- Fits inside most portable restrooms for easy transport to job sites
- Built-in lift handles provide added mobility for positioning once on-site.

### Specifications

### Model Number

#### HWS

Width (inches)	26 ½
Depth (inches)	21 ½
Height (inches)	61
Fresh water capacity	22 gallon or 83.28 liters
Waste tank capacity	24 gallon or 90.85 liters



## PTS

*Stainless Steel Prep Table with Shelf*



### Features

- Stainless steel work surface
- Model with shelf available

## PT

*Stainless Steel Prep Table*



NON REFRIGERATED

### Specifications

### Model Numbers

	PT4 / PT4S	PT5 / PT5S	PT6 / PT6S
Width (inches)	48	60	72
Depth (inches)	30	30	30
Height (inches)	35	35	35



# Sinks

**SSB1**



### Features

- Stainless steel bowl sink
- Plumbing required
- Single bowl and three bowl sinks available
- Water inlet (1 inch) and drain fitting (1¼ inch)

NON REFRIGERATED

**SSB3**



### Specifications

### Model Numbers

	SSB1	SSB3
Width (inches)	23 ½	84
Depth (inches)	24 ½	24 ½
Height (inches)	40	40

## Ready Built Cold Rooms

### Features

- “All-Weather” exterior
- Internal light
- Internal “glow in the dark” safety handle
- Easily made mobile
- Refrigerator & freezer temps available
- NSF approved “3-tier” racking included
- Secure, simple temperature control
- Non-slip floor
- Ramp included
- Fork lift friendly
- Lockable door - self closing!
- Strong hinge system
- External gauge displaying box temperature
- Quiet operation of ETL approved condensing unit
- Health and safety code compliant
- Simply hardwire to your generator or existing power!



### Specifications

External Width (inches)	94 ¼
External Length (inches)	117 ¾
External Height (inches)	93
Power Supply v/Hz/Ph	220/60/1
Amps	30

## Modular walk-in cold and freezer rooms.

*From the world's largest sporting events to state fairs, festivals, care centers, emergency relief, construction renovation, and so much more, LOWE Cold Rooms provide the perfect refrigerated storage solution.*

*Mobile & remote, climate controlled modular refrigeration / freezer cold rooms engineered for quiet efficiency even in the most challenging environments.*



8ft by 8ft Modular Walk-in Cold Room. (smallest size available)  
Length can be increased in 2ft increments.  
Width can be increased in 8ft increments with interior walls.

COLD ROOMS



Quickly built on-site • Dual temperature • Indoor and outdoor use • Pallet size doors available.

*With the largest modular cold room rental fleet in the world, LOWE Refrigeration's extensive logistical program enables us to meet your unique event requirements and ensure successful on time delivery and installation to your event.*

## **Take advantage of our freight savings!**

A large number of modular cold rooms can be loaded onto a single trailer.

This creates an efficiency and economy that ready built rooms can't duplicate.



Our steel frame leveling system allows us to place cold rooms almost anywhere, and create efficiency by placing refrigerated storage in convenient locations.



Our quick & efficient on-site build process saves you time and money.



**Tie Down Straps** can be placed over modular cold rooms to provide extra security in high wind environments. Strapping uses a ratchet and stake system that allows each unit to be pinned in place. This system includes ratchets, pin stakes, stake puller, mid and end straps.

## Cold Storage – Where you need it. When you need it.



Build on pristine grass in front of clubhouse.  
No forklift needed.



Inside or outside of any structure.  
No fumes. Almost silent!



No vehicular access - no problem. Modular cold rooms can be taken through 3ft door to build inside.



Build on a cart path or remote site with ease!

COLD ROOMS

### Specifications

**Power Requirements** 220v / 60Hz / Single Phase / 30 Amp Breaker  
(Note: LOWE can supply a splitter box allowing 2 motors to run off a single power supply.)

**Drain** Not Required

**Inside Door Handle** Glows in the dark

**Strip Curtain** Fitted at door entry

**Color** White

<b>Dimensions</b>	<b>Internal</b>	<b>External</b>
Width (inches)	88	95
Height (inches)	80	87
Length (inches)	88	95

8ft x 8ft is the smallest size available.

Length increases by increments of 2ft. Width increases by increments of 8ft with interior walls.

**Call to reserve your customized cold room!**

## LOWE Modular Cold Room Features & Benefits

*LOWE can support events anywhere in North America with modular cold rooms suitable for indoor and outdoor use.*

*Our modular cold rooms offer a clean, safe and quiet refrigeration/frozen storage option in almost any environment.*

- uneven or sloping ground
- on a cart path
- on the beach
- on dirt, grass, gravel or asphalt
- on a platform
- under a bridge
- inside a building
- inside a room
- on a rooftop
- at limited access or remote locations

Chefs and Concessions enjoy having their refrigerated storage when they need it – right next to them!

Our modular cold rooms are also available for beer cooler configuration, a climate controlled preparation, storage room or office.

(Note: Our offices in Europe and Asia provide a similar service.)



Cold Room used for keg storage.



## Contact

### USA

105 CECIL COURT  
FAYETTEVILLE, GEORGIA  
30214  
1 770 461 9001  
1 844 655 1320

### HEAD OFFICE

UNIT J, KNOCKMORE  
INDUSTRIAL ESTATE,  
MOIRA ROAD,  
LISBURN  
NORTHERN IRELAND  
BT28 2EJ  
+44 (0) 28 9260 4619

### ENGLAND

LOWE RENTAL LTD.  
UNIT 37, MARCHINGTON INDUSTRIAL  
ESTATE  
UTTOXETER, STAFFORDSHIRE  
ENGLAND  
ST14 8LP  
+44 (0) 1283 820 717

### SCOTLAND

LOWE RENTAL LTD.  
UNIT 1B EXCELSIOR PARK  
CANYON ROAD  
NETHERTON INDUSTRIAL ESTATE  
WISHAW  
SCOTLAND  
ML2 0EG  
44 (0) 16983 72902

### DUBAI

DIP 1, BUILDING WO NO.8  
DUBAI, UAE  
(+971) 4 882 9440

### SINGAPORE

7 KAKI BUKIT CRESCENT,  
FULLION BUILDING,  
#01-01 SINGAPORE 416239.  
+65 6284 1552

### HONG KONG

LOWE REFRIGERATION LTD.  
RM. 11, 14/F, WAH WAI CENTRE,  
38-40 AU PUI WAN STREET,  
FO TAN, N.T.  
HONG KONG  
+65 6284 1552

### GERMANY

LOWE DEUTSCHLAND GMBH.  
HOHLSTUCK 4  
56368 KLINGELBACH  
GERMANY  
+49 (0) 6486 9039 68

### ITALY

LOWE ITALIA SRL.  
MILANO  
ITALY  
+39 023 6000 121

### SPAIN

LOWE RENTAL LTD.  
BARCELONA  
SPAIN  
+34 9 3800 1963



**LOWE**  
WORLDWIDE RENTAL SPECIALISTS

[loweusa.com](http://loweusa.com)