




PANELS

INFORMATION


- Individual panels can be produced out of any 3mm rigid material such as foamex, correx, dibond, forex, etc.
- Loop Velcro should be applied around all the edges of the panel as Hook Velcro will be supplied with the frame.
- To avoid failure of the Velcro adhering to the panel due to climate condition changes between installation and the show opening, Velcro must be applied to the panels at least 24 hours before the show opens.
- Each printed panel has a 7mm gap between to allow for the system.

PANEL SIZES

Panel Type	Panel size (WxH)
Half metre panels	489mm x 2474 mm
Full one metre panels	986mm x 2474 mm*

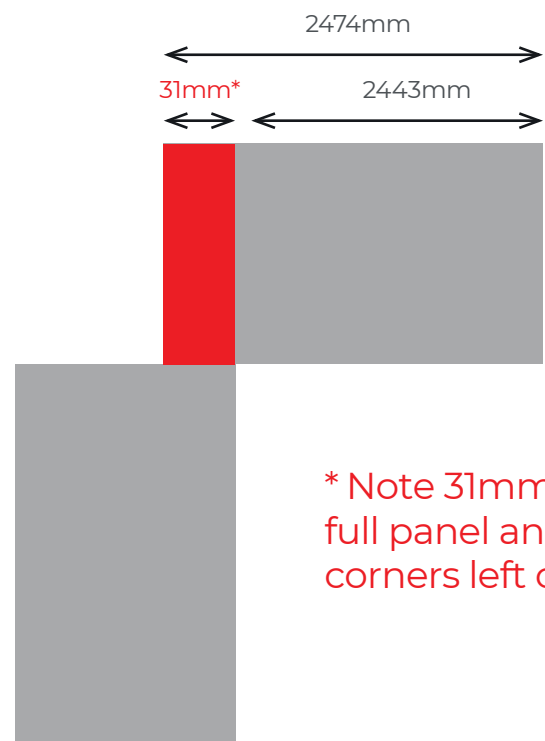

* Note 31mm goes behind back of booth on full panel and fabric where they join in corners left or right sides.

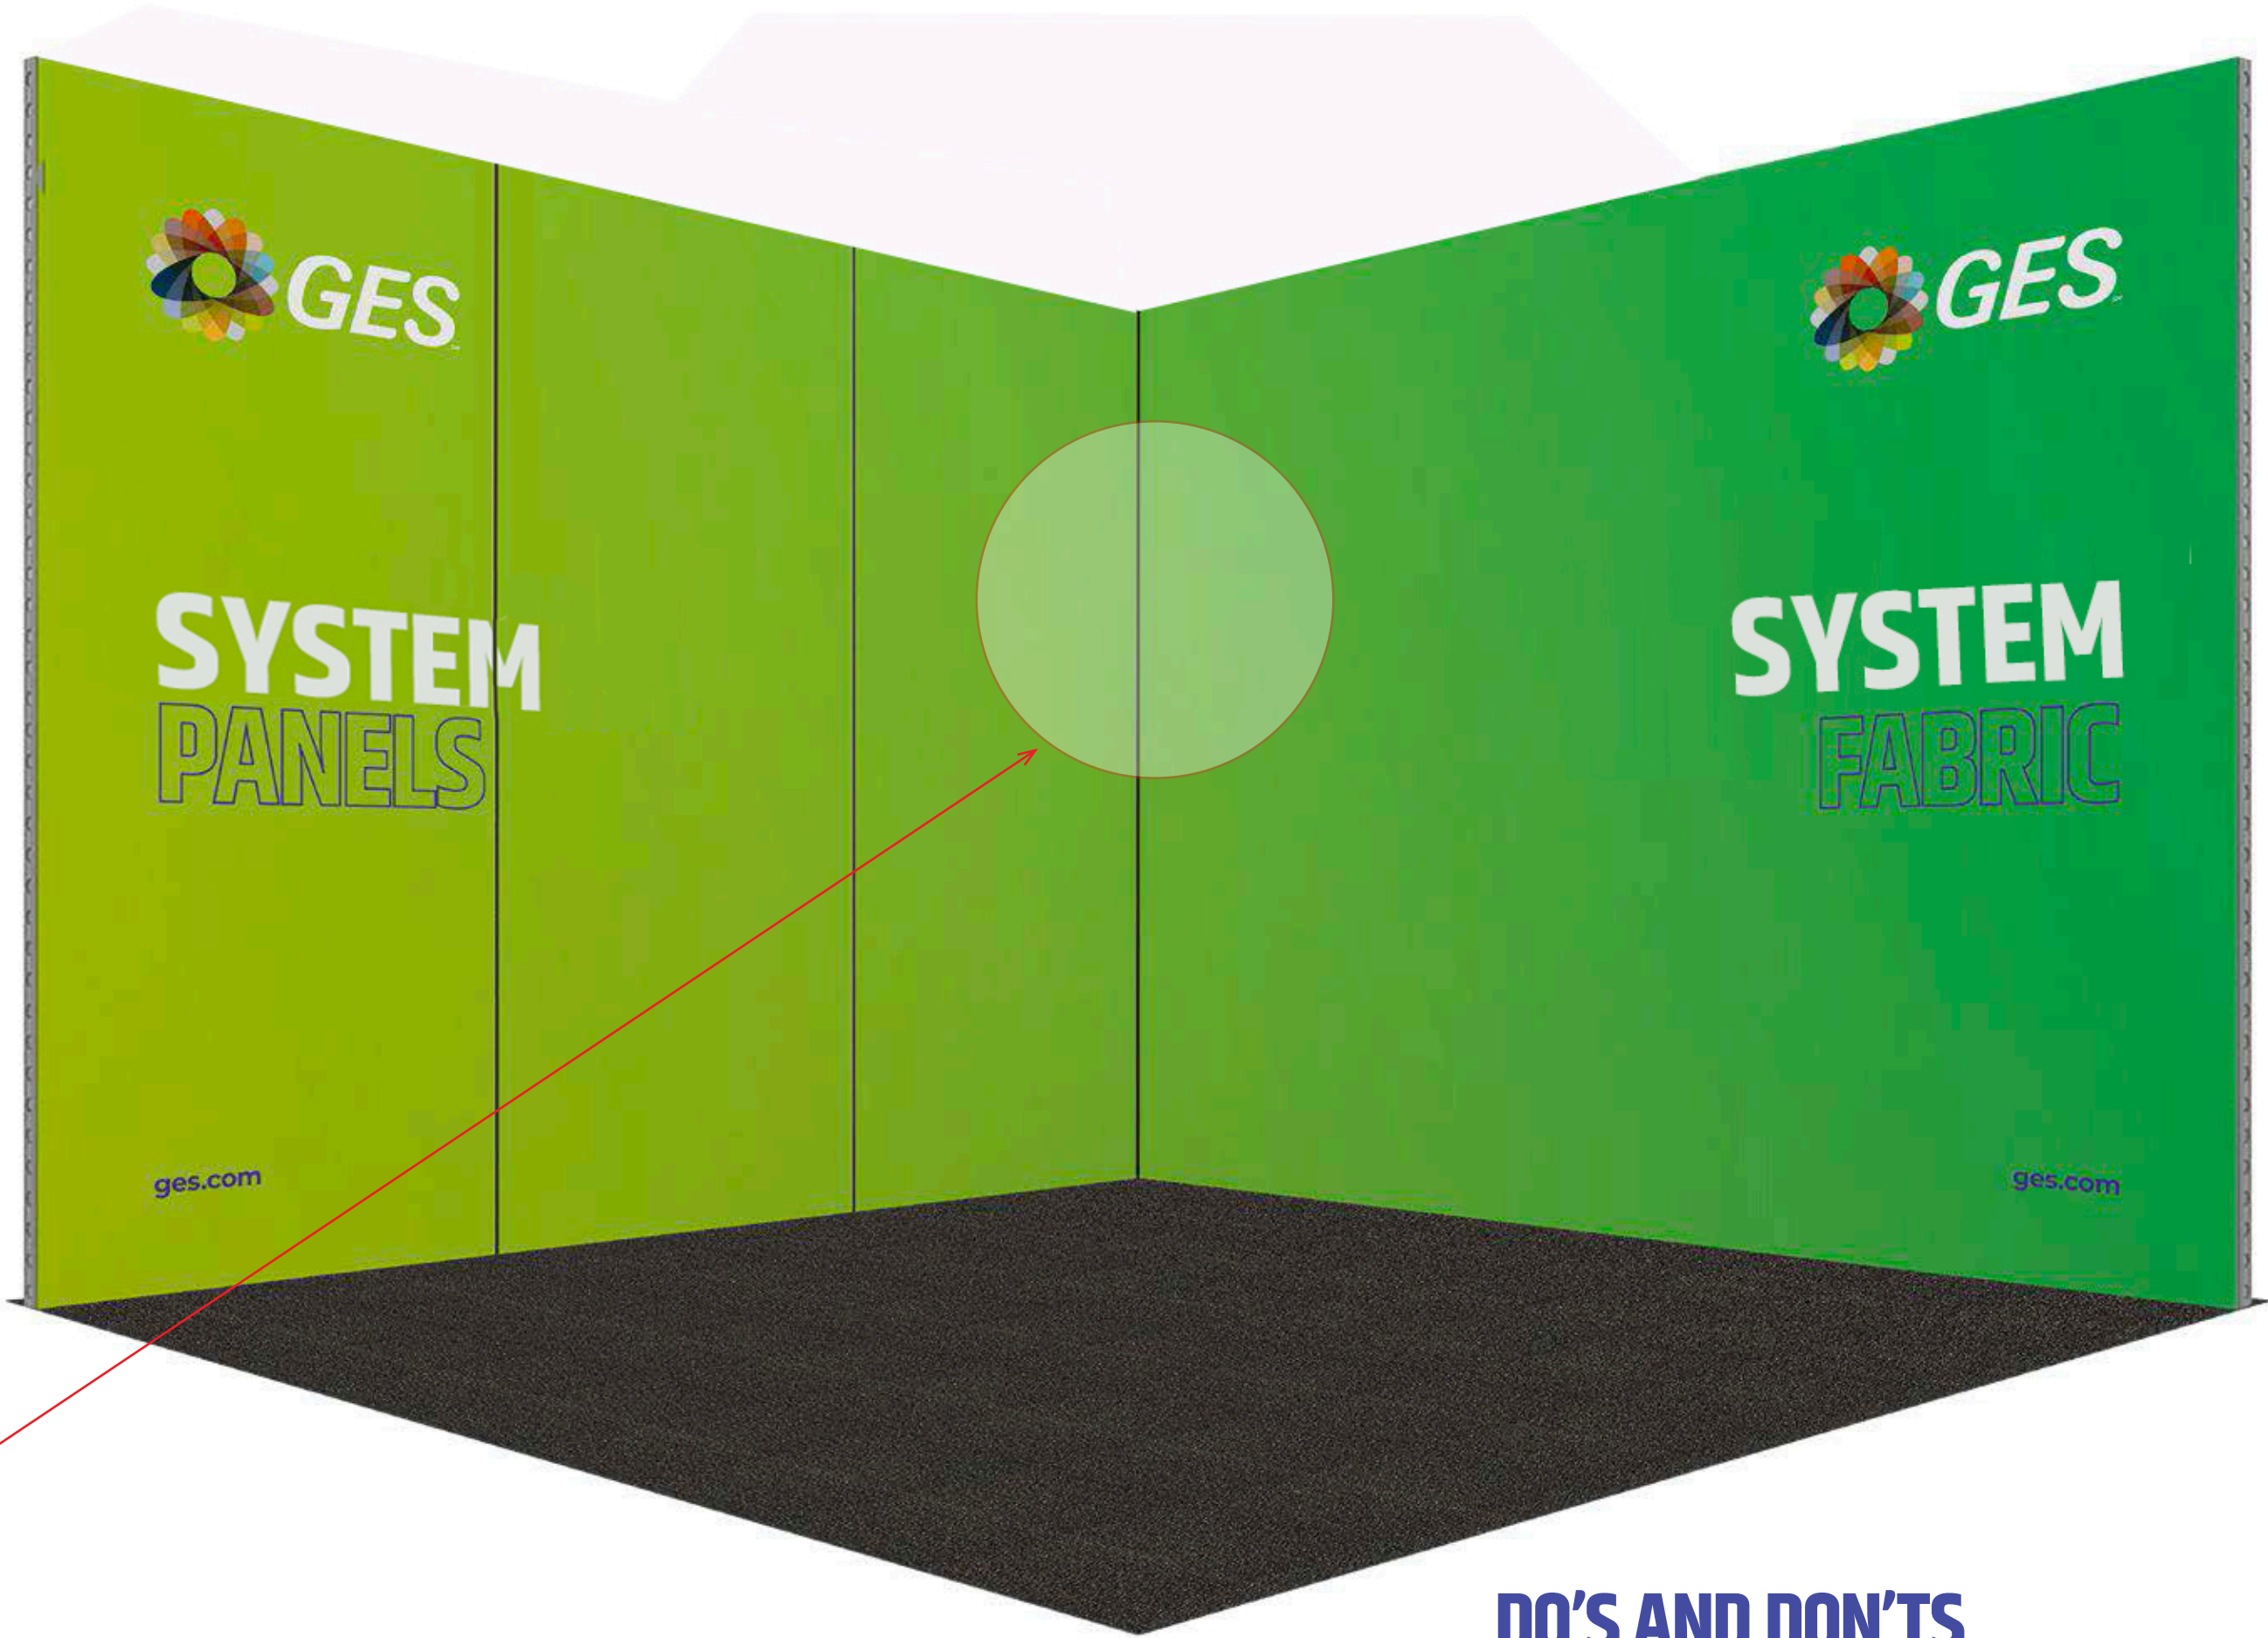

FABRIC

INFORMATION

- We are able to supply the visual area for the wall but we are not able to provide you with the physical size you require for the fabric to be produced as the type of fabric chosen by your supplier has a large impact due to the stretch and shrinkage during the manufacturing process it is recommended that you use a black backed or block out fabric to avoid any transparencies when installed.
- It is highly recommended that you use GES to supply your fabric as is manufactured to produce a high-quality finish with drum tight tension giving a superior finish.

PANEL SIZES

Fabric Width	Fabric Visual Size
2,500 mm	2,480mm
3,000 mm	2,976mm
3,500 mm	3,472mm
4,000 mm	3,968mm
4,500 mm	4,464mm
5,000 mm	4,960mm
5,500 mm	5,456mm
6,000 mm	5,952mm
6,500 mm	6,448mm
7,000 mm	6,944mm
9,000 mm	8,928mm
9,500 mm	9,424mm
10,000 mm	9,920mm

DO'S AND DON'TS

The use of the following fixings is **strictly forbidden** on this system:



NO
Nails
or pins



NO
Painting
walls



NO
Screws or
holes



NO
Stapled
fixings

Fixing on melamine / vinyl panels **is** permitted by:

- Double sided tabs provided by GES
- Hook and loop velcro